

# Structural



## 2640

Design By Arik Levy

# VIBIA

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order.

### Model Sheet

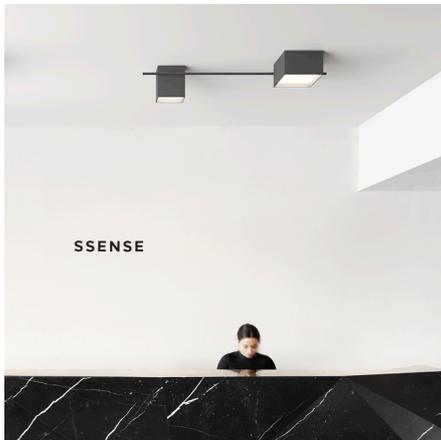

#### Finish

21 Black Grey  
NCS S 7000-N

15 Grey L2  
NCS S 2500-N

#### LED

2700 K / 3000 K / 3500 K / Tunable White

#### Control

DALI-2 / Casambi / 1-10V

#### Optional

DALI or Casambi / DALI or Casambi / DALI or Casambi

Electrical connection Surface Canopy



#### LED

CRI>90  
2700 K / 3000 K / 3500 K / Tunable White

#### Driver

Constant Voltage 110~240 V 50~60 Hz

Dimmable LED IP20 Bi-volt 50-60Hz

#### Application

Ceiling


#### Packaging

3 Box  
0.24 m x 0.38 m x 0.38 m  
Gross weight 8.4 kg  
Net weight 5.3 kg  
Vol. 0.0604 m<sup>3</sup>



#### Lighting effect

##### Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface



#### Photometric Data

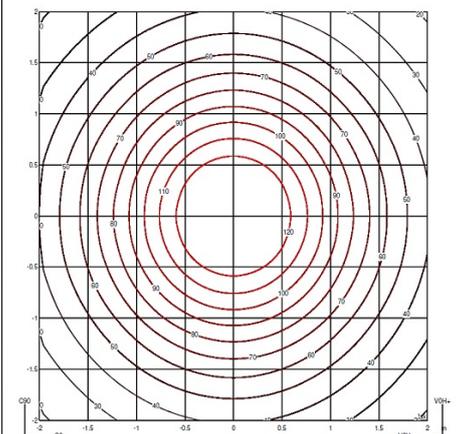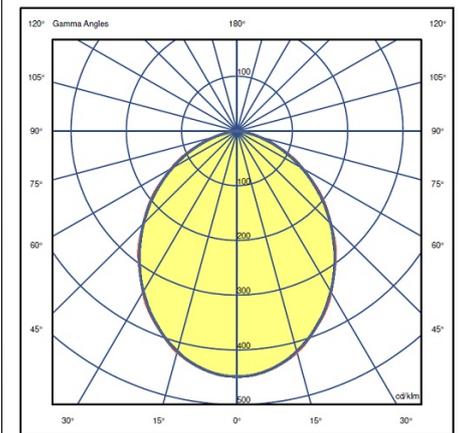

Efficiency 62.84 lm/W  
Coordinate System CG  
Total Flux 2073.70 lm  
Maximum Value 930.73 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at [www.vibia.com/warranty](http://www.vibia.com/warranty)

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

[customer.service@vibia.com](mailto:customer.service@vibia.com)

[vibia.com](http://vibia.com)