



Utförande: Vitlackerad metall. Inre skärm av opal akryl och yttre skärm i diffuserad glaskärm. Inre skärm finns även med gul och rosa ljuseffekt. Andra färger på förfrågan.

LED info: Systemeffekt se nedan. Armaturlumen se nedan. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning >RA 80.

Montage: Pendlad från tak, 2 meter kabel.

Anslutning: Kopplingsplint.

Design: Front 2017

W	D/MM	FÄRG/COLOUR	ART.
LED 880LM/9W	250	Opal/Opal	8365-1-01
LED 880LM/9W	250	Opal/Opal	8365-1-01HFF
LED 880LM/9W	250	Gul/Yellow	8365-1-14
LED 880LM/9W	250	Gul/Yellow	8365-1-14HFF
LED 880LM/9W	250	Rosal/Pink	8365-1-01
LED 880LM/9W	250	Rosal/Pink	8365-1-01HFF
LED 1947LM/26W	350	Opal/Opal	8365-3-01
LED 1947LM/26W	350	Opal/Opal	8365-3-01HFF
LED 1947LM/26W	350	Gul/Yellow	8365-3-14
LED 1947LM/26W	350	Gul/Yellow	8365-3-14HFF
LED 1947LM/26W	350	Rosal/Pink	8365-3-01
LED 1947LM/26W	350	Rosal/Pink	8365-3-01HFF
LED 2130LM/26W	450	Opal/Opal	8365-5-01
LED 2130LM/26W	450	Opal/Opal	8365-5-01HFF
LED 2130LM/26W	450	Gul/Yellow	8365-5-14
LED 2130LM/26W	450	Gul/Yellow	8365-5-14HFF
LED 2130LM/26W	450	Rosal/Pink	8365-5-01
LED 2130LM/26W	450	Rosal/Pink	8365-5-01HFF

HFF = Dimmbart DALI alt. SwitchDim/Dimmable DALI or SwitchDim


Finish: White painted metal. Inner shade in opal acrylic and outer shade in diffused glass. Inner shade available in all opalwhite or with yellow or pink stain. Other colours on request.

LED info: System power see above. Luminaire Luminous Flux see above. CCT 3000K. SDCM 3. CRI 80

Mounting: In ceiling, 2 m cable and wire.


Connection: Terminal block inside canopy.

Design: Front 2017

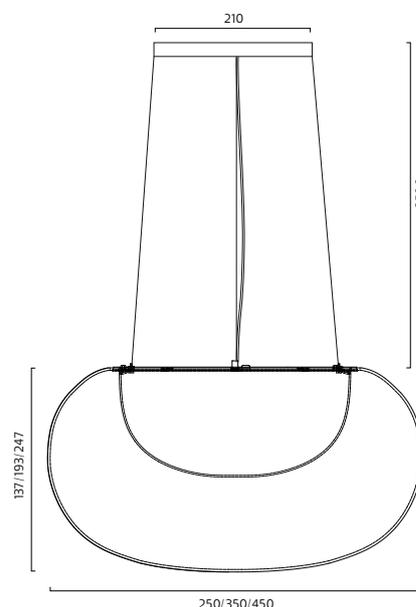




8365-1



8365-3



8365-5

