

FLINDT WALL LAMP

The wall lamp emits an asymmetrical glare-free, downward directed light distribution. Softly illuminating its cut-out shape while providing an efficient horizontal illumination on the ground or floor. Perfect for indoor as well as outdoor applications.




Christian Flindt

Christian Flindt (1972-) graduated with an MAA and MDD from Aarhus School of Architecture in 2002. He then started his own design company in 2003. Here, he placed high emphasis on communication between people, and his focus on this area finds expression in his approach to re-evaluating furniture.



Set location -
Copenhagen

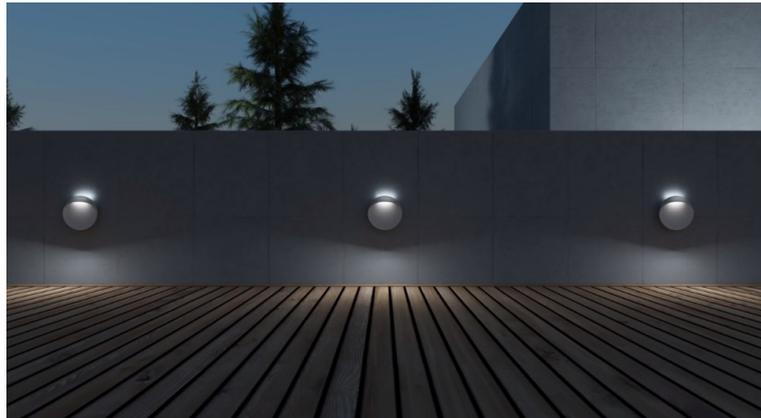

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Ø200 LED: Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

Mounting

Ø200: Installation cable 3 x 1.5 mm². Looping not possible. Integrated driver. Ø300/400: Installation cable 3 x 1.5mm² + 2 x 1.5 mm² (Dimming). Looping possible. Integrated driver.

Finish

Aluminium, Corten, White, or Black coloured. Textured surface, powder coated.

Materials

Die casted aluminum and injection molded acrylic.

Sizes and weights

width x Height x Length (mm) | 60 x 200 x 200 Max 0.9 kg | 80 x 300 x 300 Max 3.8 kg | 100 x 400 x 400 Max 6.7 kg

Class


Ingress protection IP65. Electric shock protection I w. ground. Ø200: IK08. Ø300/400: IK09.

Light source

LED 2700K 10W
Lumen: 321

Information

Ø200 LED: Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

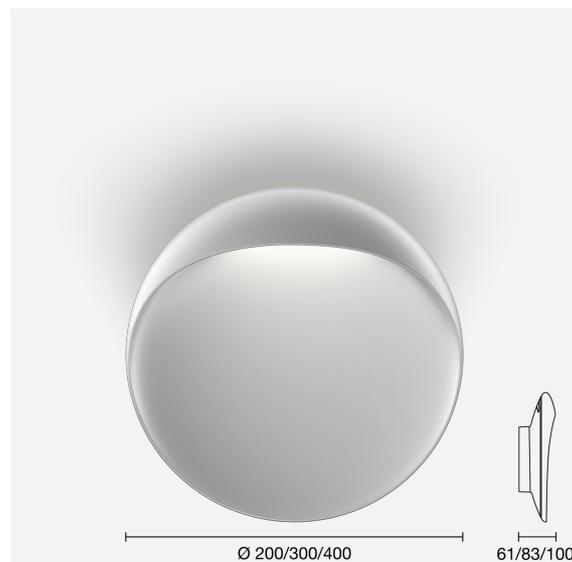


Related products



Flindt Bollard



Flindt Garden Bollard



Flindt Plaza

Product variants

Dimension	Colour	Light source	Lumen	Lighting control
Ø 200	 Aluminium colour texture	LED 2700K 10W	1020	Dali
Ø 300	 Black texture	LED 2700K 16W	1052	Phase dimming (mains dimm)
Ø 400	 Corten colour	LED 2700K 20W	270	
		LED 3000K 10W	279	
		LED 3000K 16W	291	
		LED 3000K 20W	300	
			321	
			331	
		418		
		431		
		435		
		448		
		449		
		463		
		495		
		510		
		632		
		652		
		680		
		701		
		751		
		774		

Design

Christian Flindt

Weight

Min: 0.922 kg Max: 6.653 kg

Dimensions


Ø 200, Ø 300, Ø 400

Finish


Aluminium colour texture, Black texture, Corten colour, White texture

Light distribution diagrams

Cartesian

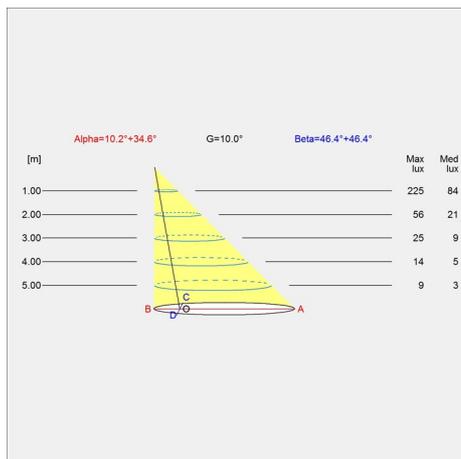

Isolux

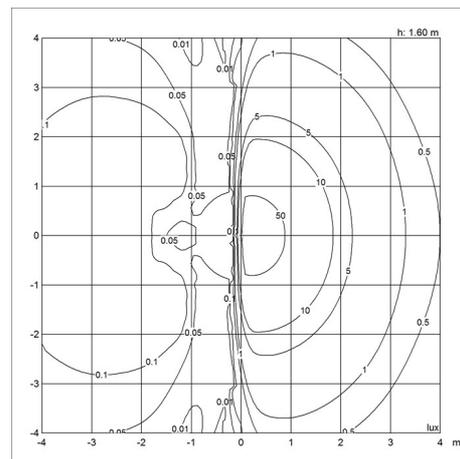

Polar

