

Palma


3764

Design By Antoni Arola

VIBIA

Pendant lamp. The effect of floating through its multiple configurations thanks to the almost imperceptible suspension and unique cable system and the hoops that wrap the spheres.

Model Sheet

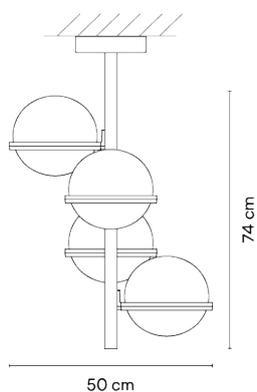

Min. quantity, upcharge and extra lead time apply

Finish	18 Graphite ADAPTA RF 9913
LED	2700 K
Control	Casambi / Push; 1-10V; DALI
Optional	Casambi / Casambi
Electrical connection	Surface Canopy
Light source	8 x LED 4,6W 500mA F
LED	CRI>90 253 lm 132 2700 K
Driver	Constant Current 500 mA 220~240 V 50~60 Hz Dimmable LED IP20 Dry Location
Application	Ceiling
Packaging	1 Box 0.796 m x 0.292 m x 0.312 m Gross weight 9.5 kg Net weight 5.4 kg Vol. 0.0725 m3



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

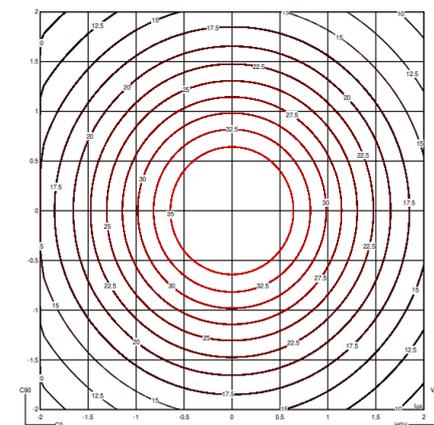

Efficiency	1
Coordinate System	CG
Total Flux	2306.02 lm
Maximum Value	67.81 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Palma


3760

Design By Antoni Arola

VIBIA

Pendant lamp. The effect of floating through its multiple configurations thanks to the almost imperceptible suspension and unique cable system and the hoops that wrap the spheres.

Model Sheet




Finish	18 Graphite ADAPTA RF 9913
LED	2700 K
Control	Push; 1-10V / Casambi / DALI
Optional	DALI or Casambi / DALI or Casambi / DALI or Casambi
Electrical connection	Surface Canopy

Light source	4 x LED 4,6W 500mA
LED	CRI>90 253 lm 132 2700 K
Driver	Constant Current 500 mA 110~240 V 50~60 Hz
Application	Ceiling
Packaging	1 Box 0.796 m x 0.292 m x 0.312 m Gross weight 6.2 kg Net weight 3.9 kg Vol. 0.0725 m3



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

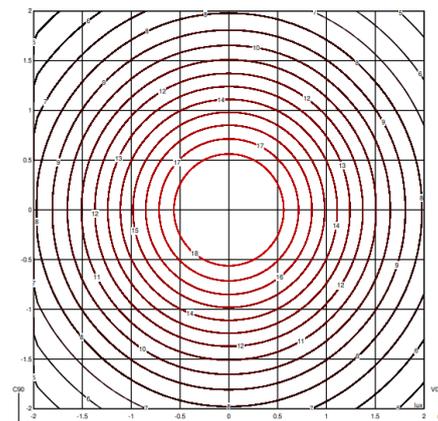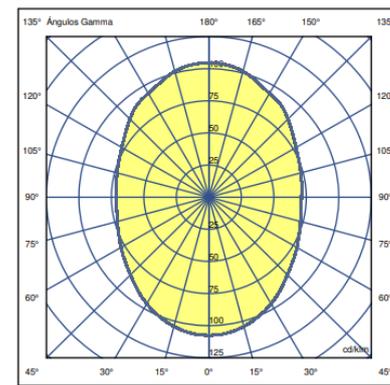

Efficiency	1
Coordinate System	CG
Total Flux	1153.01 lm
Maximum Value	67.81 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com