

TOLDBOD PENDANT

The pendant emits soft downwards directed light. The matt, white-painted inside of the elliptical shade helps to assure even distribution of the light.



**Original Coffee,
Copenhagen**



Dalum Papirfabrik

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Mounting

Suspension type: Cable 2x0,75 mm². Ø400: Cable and wire. Cable length: 3 m. (Ø120/Ø170), 4 m. (Ø250/Ø400). Canopy: Yes. Black and white cords.

Finish

Black, White, Light Grey or Blue-Grey, matt powder coated.

Materials

Shade: Spun aluminium. Ø120 reflector: Spun white matt coated aluminium. Ø400 diffuser: Matt acrylic

Sizes and weights

width x Height x Length (mm) | 120 x 121 x 120 Max 0.7 kg | 170 x 173 x 170 Max 1.0 kg | 250 x 254 x 250 Max 1.4 kg

Class

Ingress protection IP20. Electric shock protection II w/o ground.

Light source

1xG9



Related products



Toldbod 155 Outdoor Wall Lamp



Toldbod 155 Bollard



Toldbod Glass Pendant



Toldbod 290 LED Upgrade Kit



Toldbod 220 Outdoor Wall Lamp



Toldbod 290 Outdoor Wall Lamp



Toldbod 290 Post

Product variants

Dimension	Colour	Cable type	Light source	Class
Ø 120	 Black	Black textile cord	1xE14	-
Ø 170	 Blue-grey	White textile cord	1xE27	II
Ø 250	 Light grey		1xG9	
Ø 400	 White			

Design

Louis Poulsen A/S

Weight

Min: 0.66 kg Max: 3.362 kg

Dimensions


Ø 120, Ø 170, Ø 250, Ø 400

Finish


Black, Blue-grey, Light grey, White

Light distribution diagrams


Cartesian

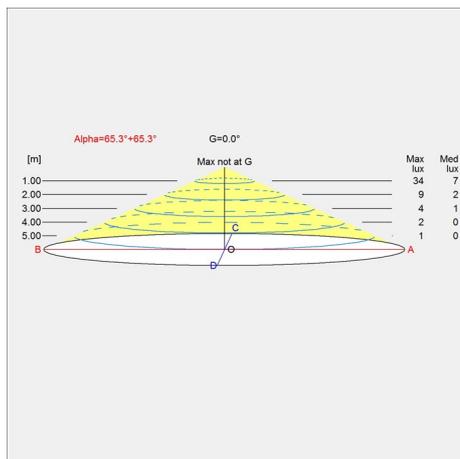

Isolux

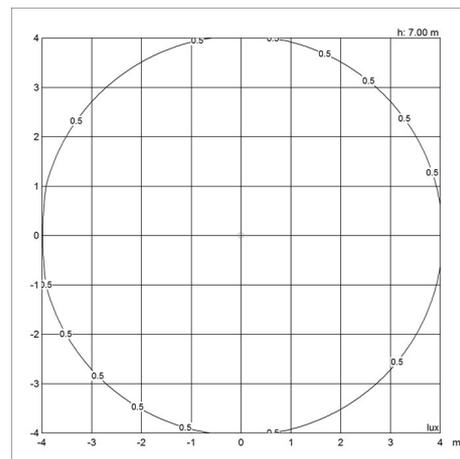

Polar

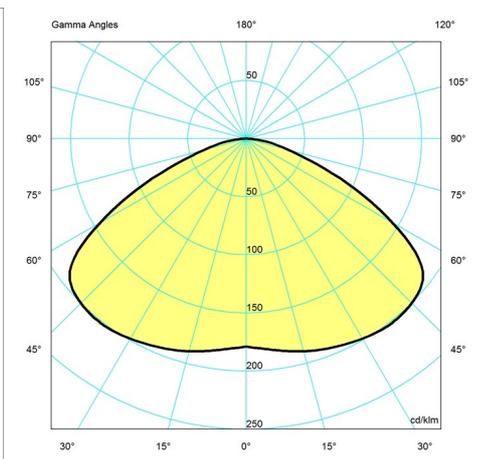

Spare parts & accessories

Toldbod Pendant

Product

Variant number

Canopy Black 2-part tophat®

5749329021

Canopy White 2-part tophat ®

5749329034