



Utförande: Perforerad metall med kvadratiska hål alt. sträckmetall.

Lackerad gul, orange, klarlackerad metall alt. transparent guldlack. Grid har ett rått uttryck och man kan se svetsfogar mm genom den transparenta lacken. LED modell har ett opal bländskydd.

Montage: Pendlas i vajer.

Anslutning: Kabel med stickpropp, vid HFF utan stickpropp.

Design: Front 2011.

W	MODELL/MODEL	ART.
T5 Lysrör/T5 Light tube		
25/28/50/54W	Fyrkantshål/Square holes	8131-1-XX
25/28/50/54W	Fyrkantshål/Square holes	8131-1-XXHFF
25/28/50/54W	Sträckmetall/Expanded metal	8132-1-XX
25/28/50/54W	Sträckmetall/Expanded metal	8132-1-XXHFF
LED/LED		
LED 2600LM	Fyrkantshål/Square holes	8126-1-XX
LED 2600LM	Fyrkantshål/Square holes	8126-1-XXHFF
LED 2600LM	Sträckmetall/Expanded metal	8127-1-XX
LED 2600LM	Sträckmetall/Expanded metal	8127-1-XXHFF
XX= -14 Gul/Yellow, -41 Orange/Orange, -76 Metall/Metal, -77 Guldlack/Gold		
HFF = Dimmbar med DALI, DSI, SwitchDim		
HFF = Dimmable with DALI, DSI, SwitchDim		
TILLBEHÖR/ACCESSORY Endast möjlig med T5/Only possible with T5		
Reflektor/Reflector		98130-1-82
Dragströmbrytare/Pull-switch		98131-1-82
Dragströmbrytare med dimmerfunktion, endast till HFF		98132-1-82
Pull-switch with dimmerfunction, only for HFF version		


Finish: Perforated metal with square holes or expanded metal. Yellow,


orange, clear painted metal or transparent gold varnish. Grid has a raw finish and one can see weldings through the transparent varnish. LED model has an opal diffuser.

Installation: Ceiling, pendant wire.

Connection: Cable and plug, when HFF without plug.

Design: Front 2011.

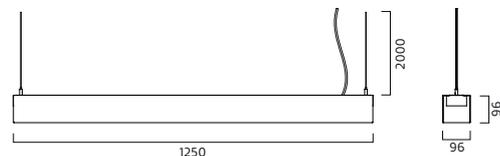

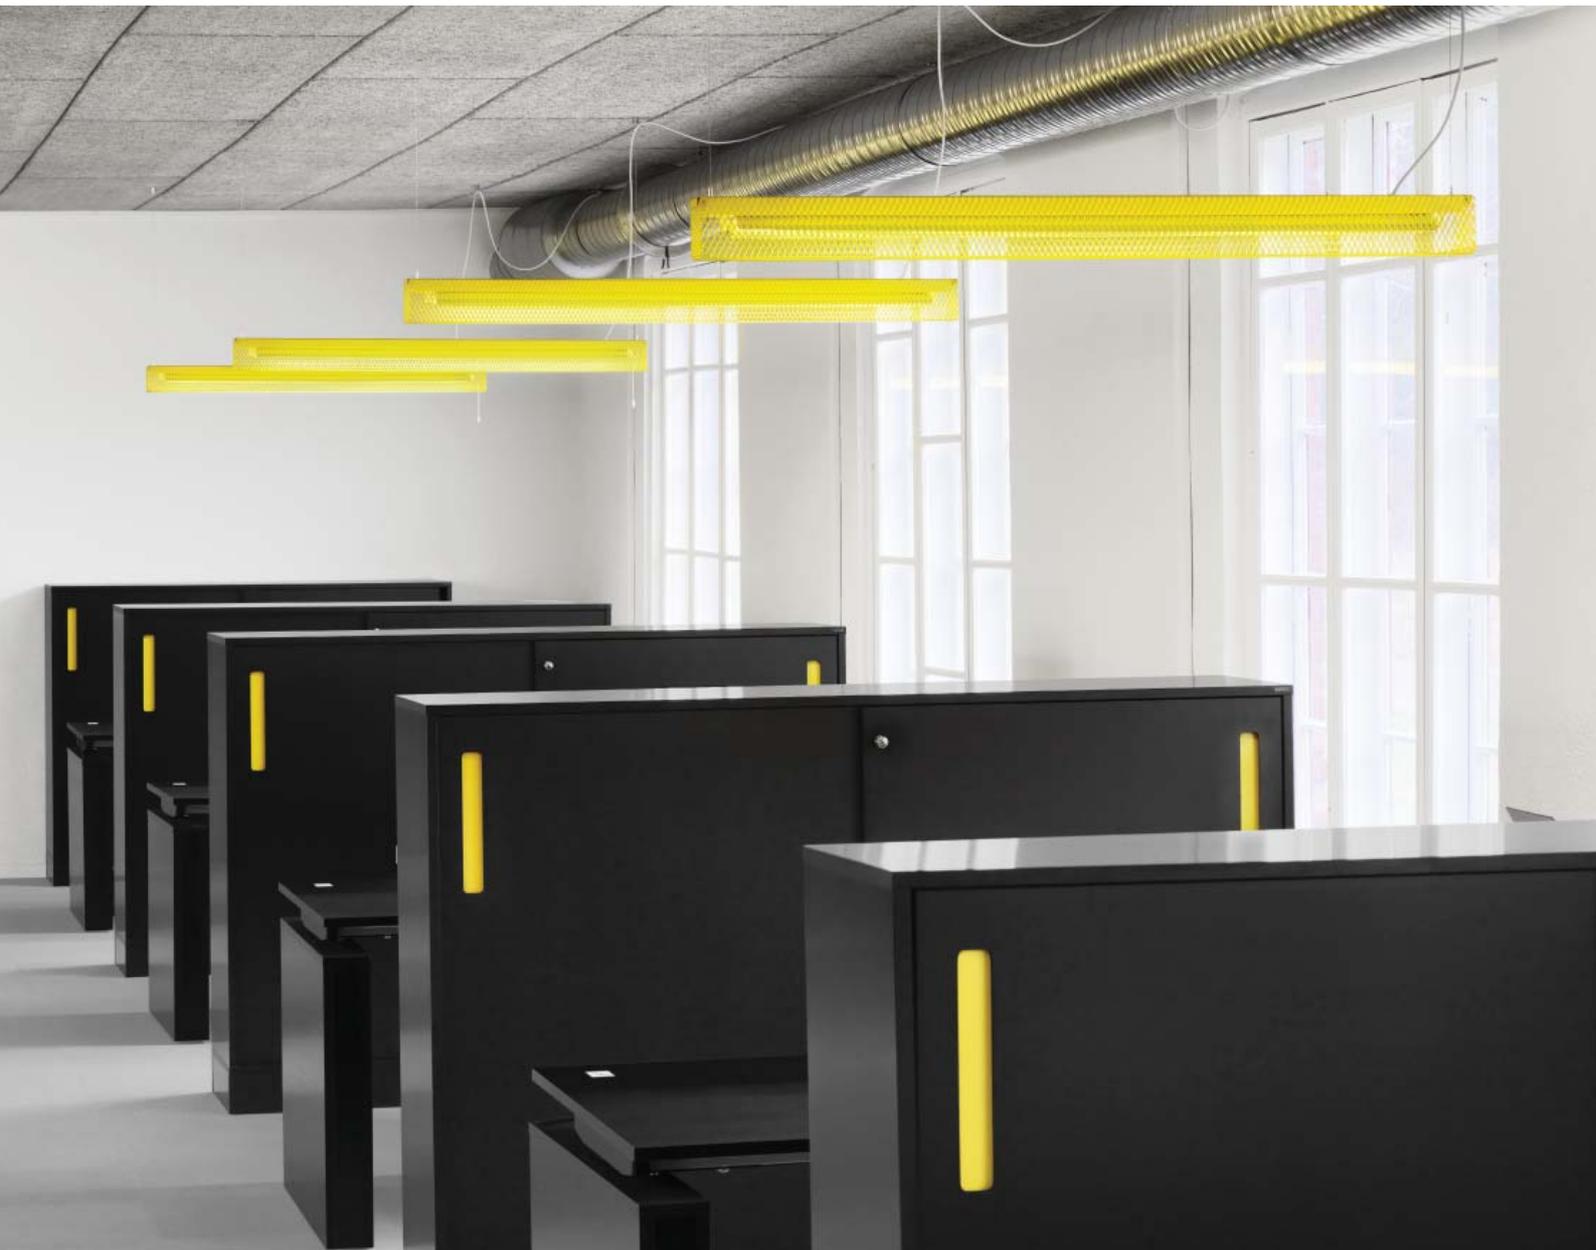

GRID med reflektor/*GRID with reflector*