

Duo petra



4877

VIBIA

Design By Ramos & Bassols

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The angled ceiling model is perfect for directing its diffuse lighting towards the required location.

Model Sheet

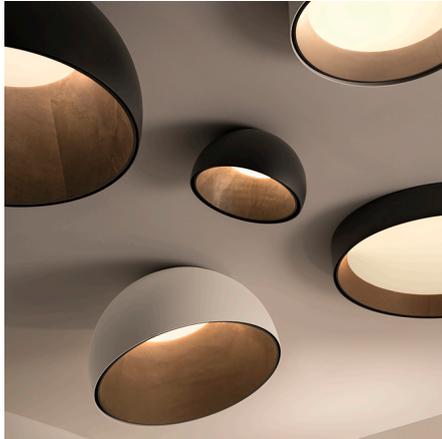

Finish	 58 Cream RAL 7044
	 18 Graphite ADAPTA RF 9913
	 93 White RAL 9016
LED	2700 K / 3500 K / Tunable White
Control	DALI / CASAMBI / PUSH 1-10V
Optional	DALI or Casambi / DALI or Casambi / DALI or Casambi
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 12W 350mA 
LED	CRI>90 1100 lm 91.66 2700 K / 3500 K / Tunable White
Driver	Constant Current 350 mA 110~240 V 50~60 Hz     50-60Hz
Application	Ceiling
Packaging	1 Box 0.436 m x 0.436 m x 0.348 m Gross weight 5 kg Net weight 4 kg Vol. 0.0661 m ³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

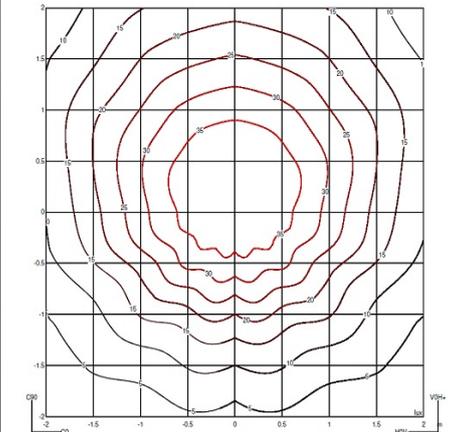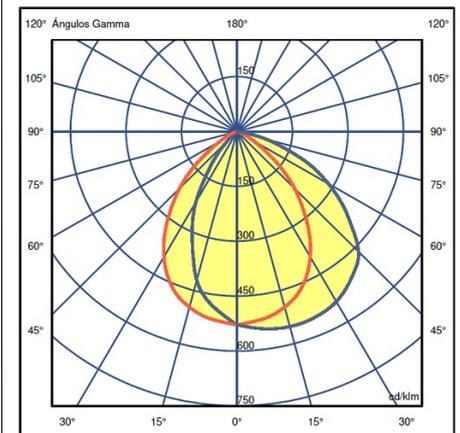

Efficiency	44.282 lm/W
Coordinate System	CG
Total Flux	612.4 lm
Maximum Value	552.42 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Duo petra


4881

Design By Ramos & Bassols

VIBIA

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The angled ceiling model is perfect for directing its diffuse lighting towards the required location

Model Sheet

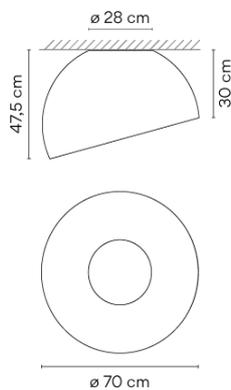

Min. quantity, upcharge and extra lead time apply

Finish

- 23 Warm White
test ral
- 93 White
RAL 9016
- 18 Graphite
ADAPTA RF 9913
- 58 Cream
RAL 7044
- 24 Beige M1
test ral

LED

2700 K / 3500 K / Tunable White

Control

DALI / PUSH 1-10V DALI / CASAMBI

Electrical connection Surface Canopy

Light source

1 x LED PLATE 26W 500mA



LED

CRI>90 2068 lm 109
2700 K / 3500 K / Tunable White

Driver

Constant Current 500 mA 110~240 V
50~60 Hz



Application

Ceiling

Packaging

1 Box
0.593 m x 0.785 m x 0.785 m
Gross weight 16 kg
Net weight 14 kg
Vol. 0.3654 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

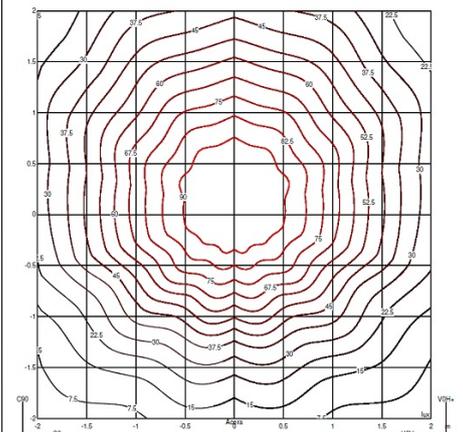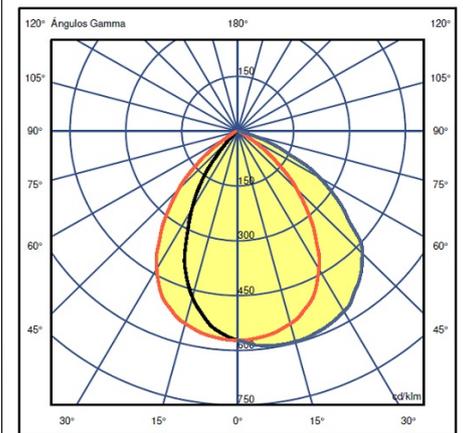

Efficiency 47.803 lm/W
Coordinate System CG
Total Flux 1251 lm
Maximum Value 596.17 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com