

Duo petra



4873

VIBIA

Design By Ramos & Bassols

Duo Petra is a surface installation ceiling light where the natural appearance of slate on the inside is combined with the technical elegance of the aluminium metal casing on the outside. Its large dimensions and diffuse lighting help illuminate large spaces with a single electrical connection.

Model Sheet

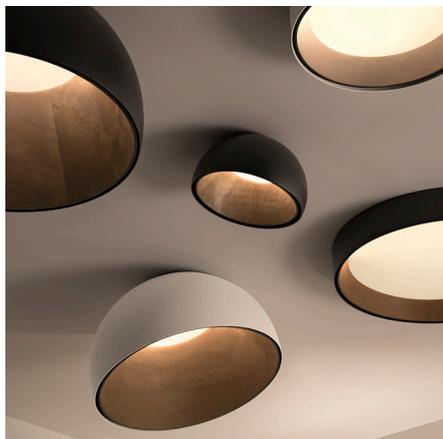

Finish

18 Graphite
ADAPTA RF 9913

58 Cream
RAL 7044

93 White
RAL 9016

LED

2700 K / 3500 K / Tunable White

Control

PUSH 1-10V DALI / CASAMBI / DALI

Optional

Casambi / Casambi / Casambi

Electrical connection Surface Canopy



LED

CRI>90 3958.8 lm 98
2700 K / 3500 K / Tunable White

Driver

Constant Current 500 mA 110-240 V
50-60 Hz

Dimmable LED IP20 Bi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
0.896 m x 0.882 m x 0.249 m
Gross weight 19 kg
Net weight 17 kg
Vol. 0.1967 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

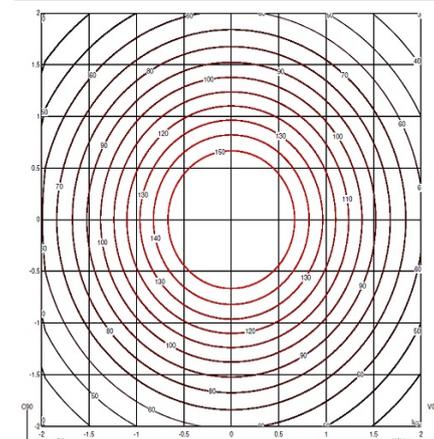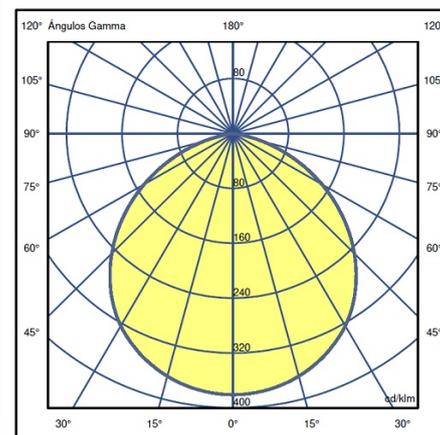

Efficiency 77.317 lm/W
Coordinate System CG
Total Flux 3580.0 lm
Maximum Value 380.69 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra



4871

Design By Ramos & Bassols

VIBIA

Duo Petra is a surface installation ceiling light where its interior natural slate appearance is combined with the technical elegance of its aluminium outer shell.

Model Sheet

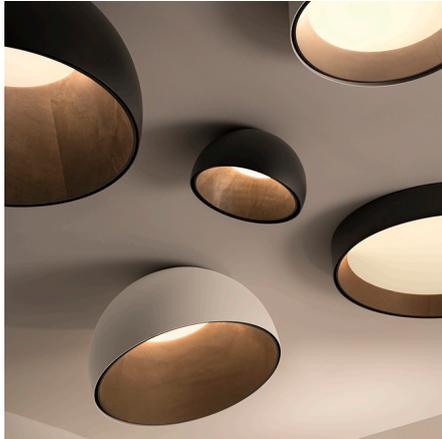

Finish	 58 Cream RAL 7044
	 93 White RAL 9016
	 18 Graphite ADAPTA RF 9913
LED	2700 K / 3500 K / Tunable White
Control	CASAMBI / DALI / PUSH 1-10V DALI
Optional	Casambi / Casambi / Casambi
Electrical connection	Surface Canopy


Light source	1 x LED PLATE 26W 500mA
LED	CRI>90 2206 lm 98 2700 K / 3500 K / Tunable White
Driver	Constant Current 500 mA 110-240 V 50-60 Hz
	

Application	Ceiling
Packaging	1 Box 0.558 m x 0.558 m x 0.255 m Gross weight 7 kg Net weight 6 kg Vol. 0.0793 m ³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

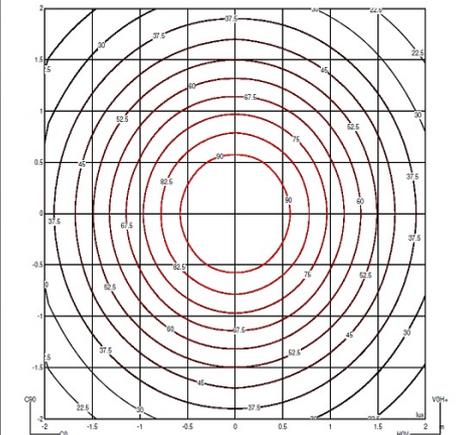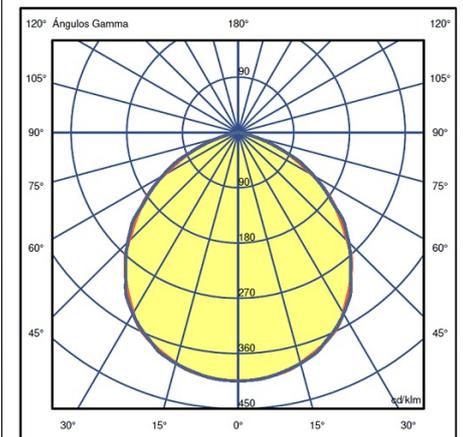

Efficiency	69.505 lm/W
Coordinate System	CG
Total Flux	1796.0 lm
Maximum Value	404.43 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com