

Structural



2610

Design By Arik Levy

VIBIA

Wall light that marks coordinates with a rectilinear language, connects points of light in space, relates planes and underlines the architectural dimension. Indirect lighting and composition based on volumes clarify light and shade.

Model Sheet

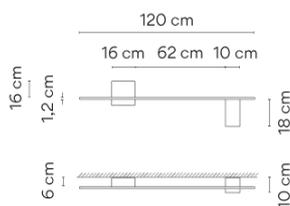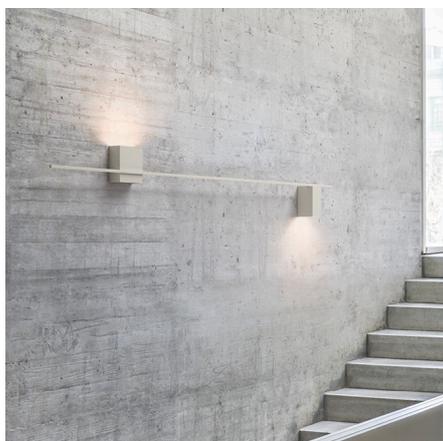


Finish	 21 Black Grey NCS S 7000-N
	 15 Grey L2 NCS S 2500-N
LED	2700 K / 3000 K / 3500 K
Control	Casambi / 1-10V / DALI-2
Optional	DALI or Casambi / DALI or Casambi / DALI or Casambi
Electrical connection	Surface Canopy

	
LED	CRI>90 2700 K / 3000 K / 3500 K
Driver	Constant Voltage 110-240 V 50-60 Hz
	
Application	Wall
Packaging	2 Box 0.224 m x 0.325 m x 0.37 m Gross weight 4 kg Net weight 2.2 kg Vol. 0.0326 m ³



Lighting effect

Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

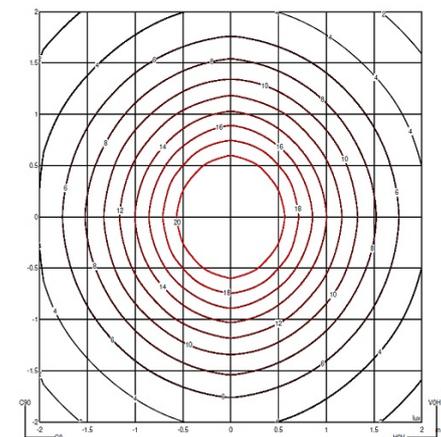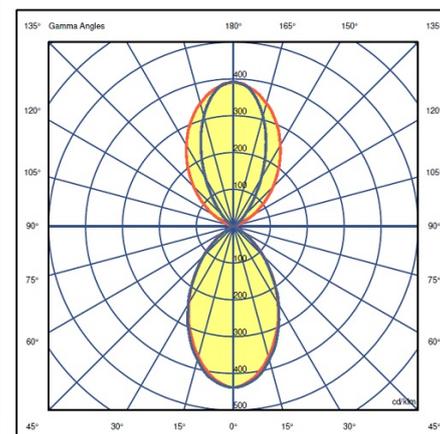

Efficiency	100.00%
Coordinate System	CG
Total Flux	378.81 lm
Maximum Value	438.41 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com