

Structural

2630

Design By Arik Levy

VIBIA

Ceiling light with basic lines and cubic volumes that form sculptures integrated into the architecture.

Model Sheet



Finish	 21 Black Grey NCS S 7000-N
	 15 Grey L2 NCS S 2500-N
LED	2700 K / 3000 K / 3500 K / Tunable White
Control	DALI-2 / 1-10V / Casambi
Optional	DALI or Casambi / DALI or Casambi / DALI or Casambi
Electrical connection	Surface Canopy


LED	 CRI>90 2700 K / 3000 K / 3500 K / Tunable White
	Driver Constant Voltage 110~240 V 50~60 Hz
Application	Ceiling
Packaging	1 Box 0.21 m x 0.31 m x 0.31 m Gross weight 2.7 kg Net weight 2.2 kg Vol. 0.0201 m ³

Min. quantity, upcharge and extra lead time apply



Lighting effect

Hidden Diffuser

Subtly directed diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

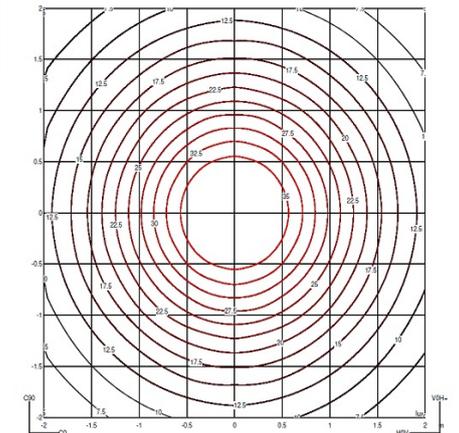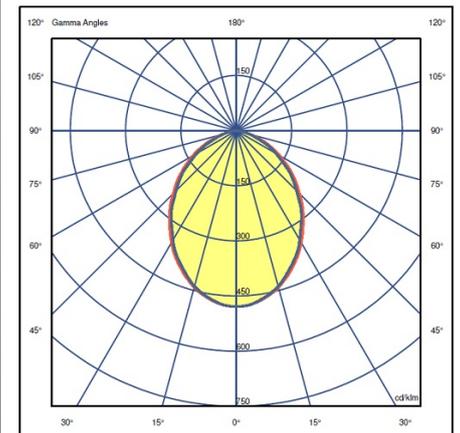

Efficiency	51.19 lm/W
Coordinate System	CG
Total Flux	565.65 lm
Maximum Value	270.71 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com