


# BALLERUP

The light distribution is symmetric and directed downwards. The vertical three-layer mouth-blown glass cylinder provides a soft and comfortable light on the ceiling around the fixture, as well as reducing glare for passers-by.

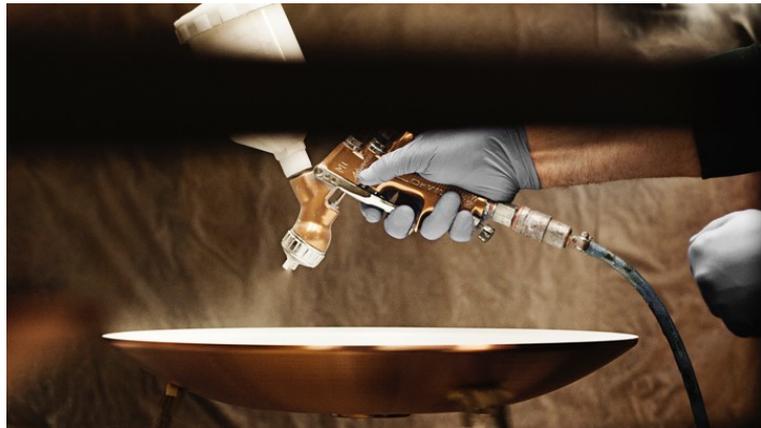

## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Mounting

Termination: Plug 5x2.5mm<sup>2</sup>. Ceiling thickness: 1-45mm. Ceiling Cut-Out: Ø 142mm. Looping: Not approved. For more information please look at [www.louispoulsen.com](http://www.louispoulsen.com).

### Finish

White, powder coated. White opal glass.

### Materials

Diffuser: Mouth-blown white opal glass. Housing: Spun steel.

### Sizes and weights

width x Height x Length (mm) | 165 x 140 x 165 Max 1.1 kg

### Class

Ingress protection IP20. Electric shock protection I w. ground.


### Specification notes

For Switch-Dim, contact Louis Poulsen.

### Light source

LED 3000K 13W

Lumen: 1076

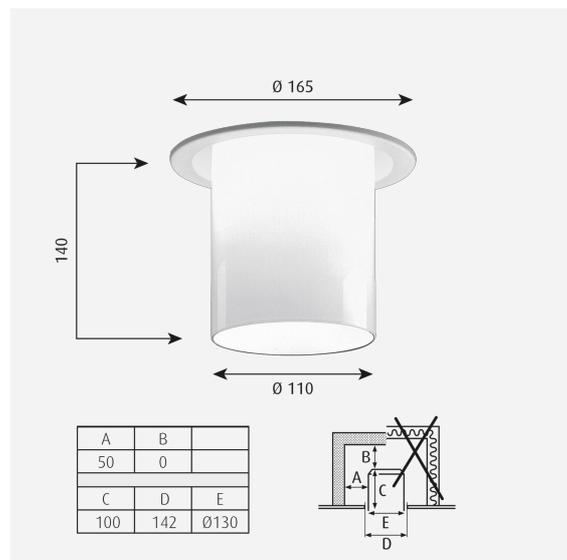

## Related products



Ballerup Mini

## Product variants

### Light source

LED 3000K 13W

# Product description

Semi-recessed luminaire  
Family with two dimensions  
Decorative light distributing part in opal glass  
Low build-in height  
Well for low ceiling installations  
Driver hardwired to housing (Europe)  
Driver can freely be positioned near housing (Europe)  
Very easy to maintain

---

## Mounting

Simple ceiling installation in either ceiling tile or hard ceiling  
Driver hardwires to housing (Europe)  
Front glass easy to maintain.  
US SPECIFIC  
Simple installation into ceilings up to 1" thick.  
Rough-in section available to ship separately from trim.  
Mounting brackets: vertically adjustment of 1.5 inches. Fits C-channel, 1/2" NPT conduit, or flat bar.  
Junction box accommodates through wiring, with 1/2" conduit knock-outs.  
Tool-less connector between power supply and driver.  
Driver mounting plate snaps into junction box for simple installation and servicing.  
Electrical assembly removable from below ceiling.

---

## Light description

Majority downward directed light  
Part of light distributed in mouth blown opal glass  
Illuminated the ceiling  
Reducing contrast/luminance between luminaire and ceiling  
Very low glare  
LED CRI >90  
Die-cast aluminium heat sink ensuring good heat management. Tc point kept low for longer life on LED.  
Dimmable

---

## Design

C. J. Nørgaard Pedersen & P. Hougaard Nielsen

---

## Material

Die-cast aluminium housing powder coated white, Ensuring good heat management of LED  
Mouth blown opal glass  
US SPECIFIC  
Electronic constant current, class II driver for 120-277V operation and 0-10V dimming control, mounted onto junction box.  
Mounting pan, 11. 0" x 8. 1", galvanized steel 2mm (0. 08") thick.  
Mounting brackets: galvanized steel 2mm (0. 08") thick.  
Junction box: galvanized steel 2mm (0. 08") thick.  
Conduit: flexible aluminum.

---

## Weight


1.064

# Finish


White

# Light distribution diagrams


### Cartesian

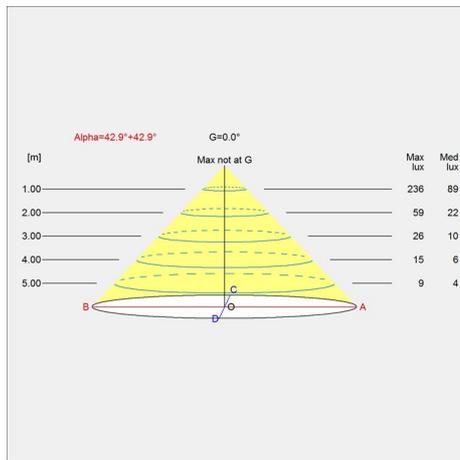

### Isolux

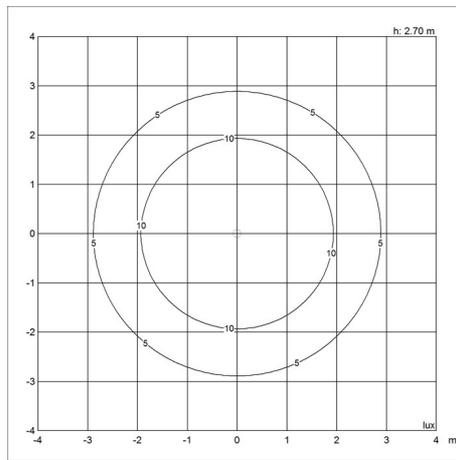

### Polar

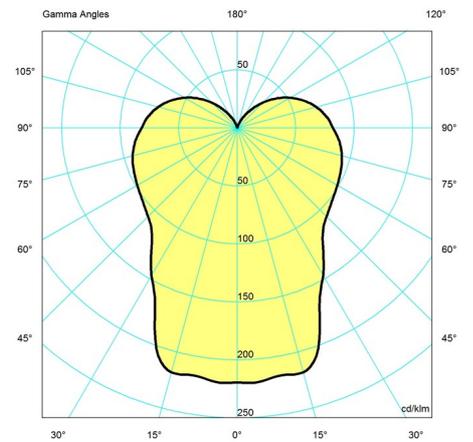

# Spare parts & accessories

Product

Ballerup glass

Variant number

5742560023