

Bind solo


6600

Design By undefined

VIBIA

Bind Solo provides an indirect down lighting offering a perfect integration within its surrounding architecture by being totally recessed.

Model Sheet



Finish

24 Beige M1
test ral

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K

Control

NO DRIVER / On/Off / PUSH DALI / CASAMBI

Electrical connection Remote driver Built-in Micro

Light source

1 x LED 4.3W 250 mA



LED

CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver

Constant Current 250 mA 220~240 V
50~60 Hz

F / IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.15 m x 0.075 m
Gross weight 0.63 kg
Net weight 0.15 kg
Vol. 0.0016 m³



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

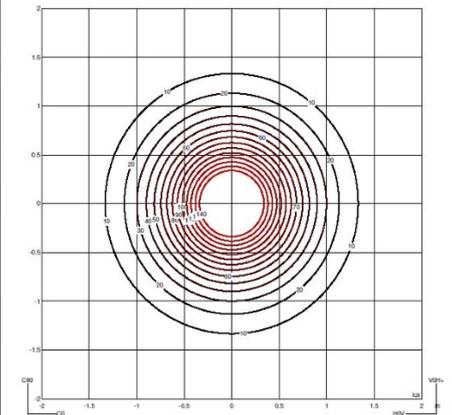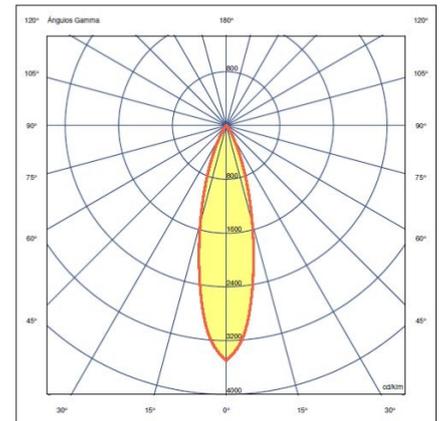

Efficiency 75.909 lm/W
Coordinate System CG
Total Flux 334.0 lm
Maximum Value 3500.41 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com