

Bind solo


6660

Design By undefined

VIBIA

Bind Solo provides accent down light via a surface mounted fitting. The angle of aperture creates high contrasts over long distances.

Model Sheet

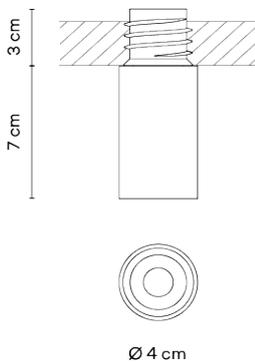

Min. quantity, upcharge and extra lead time apply

Finish	 24 Beige M1 test ral
	 04 Black NCS S 8500N
LED	2700 K / 3000 K / 3500 K
Control	NO DRIVER / PUSH DALI / On/Off / CASAMBI

Electrical connection Remote driver Built-in Micro

Light source	1 x LED 5,2W 300mA 
LED	CRI>90 530 lm 101,9 2700 K / 3000 K / 3500 K
Driver	Constant Current 300 mA 220~240 V 50-60 Hz  
Application	Ceiling
Packaging	1 Box 0,15 m x 0,15 m x 0,075 m Gross weight 0,72 kg Net weight 0,24 kg Vol. 0,0016 m3



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

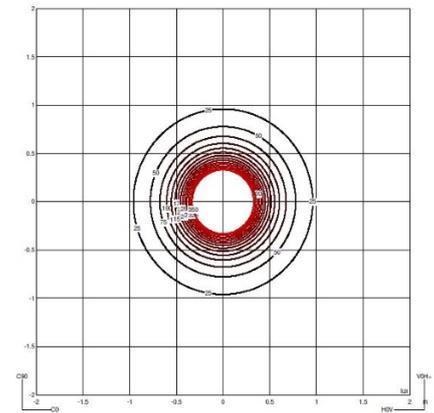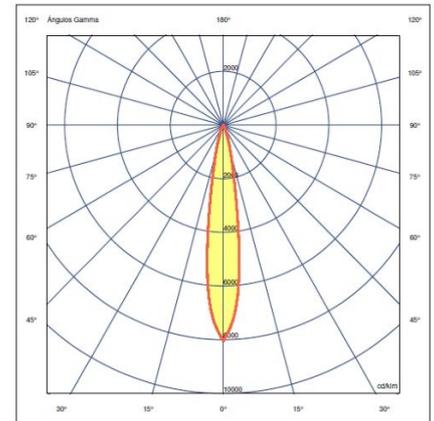

Efficiency	90.928 lm/W
Coordinate System	CG
Total Flux	491.0 lm
Maximum Value	8039.76 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com