

Bind solo



6610

VIBIA

Design By undefined

Bind Solo provides downwards accent lighting via a surfaced mounted fitting. The angle of aperture allows for the creation of high contrasts over long distances.

Model Sheet

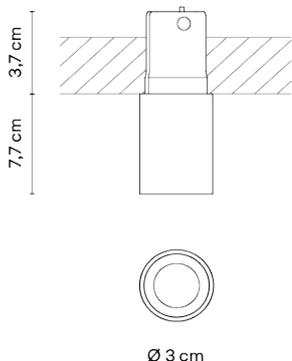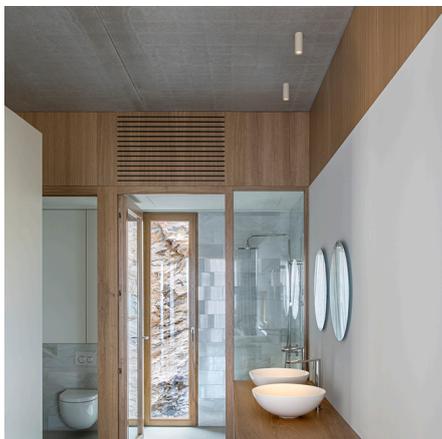

Finish

04 Black
NCS S 8500N

24 Beige M1
test ral

LED

2700 K / 3000 K / 3500 K

Control

NO DRIVER / CASAMBI / PUSH DALI
/ On/Off

Electrical connection Remote driver Built-in Micro

Light source

1 x LED 4.3W 250 mA



LED

CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver

Constant Current 250 mA 220-240 V
50-60 Hz

IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.15 m x 0.075 m
Gross weight 0.66 kg
Net weight 0.18 kg
Vol. 0.0016 m³



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

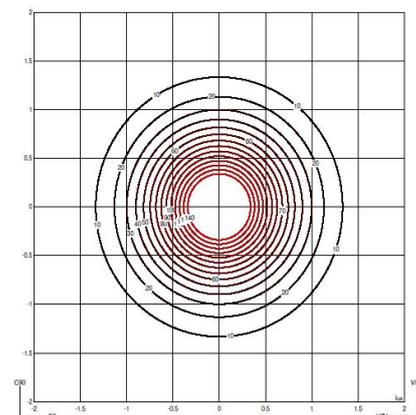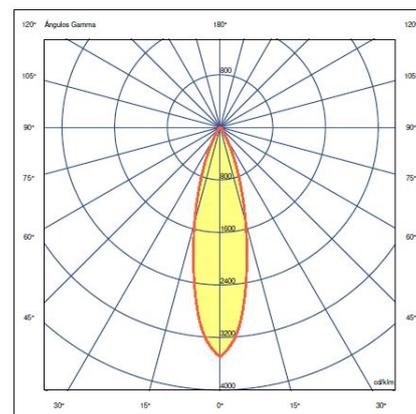

Efficiency 75.909 lm/W
Coordinate System CG
Total Flux 334.0 lm
Maximum Value 3500.41 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com