
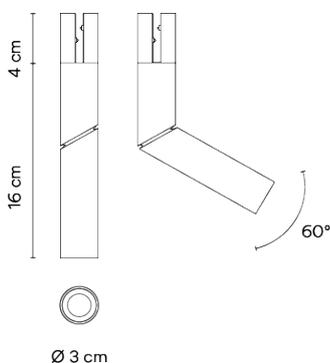


Design By Martín Azúa

The Bind spotlight allows for visual gradations, as well as highlighting functional areas, objects, or architectural elements.

Model Sheet

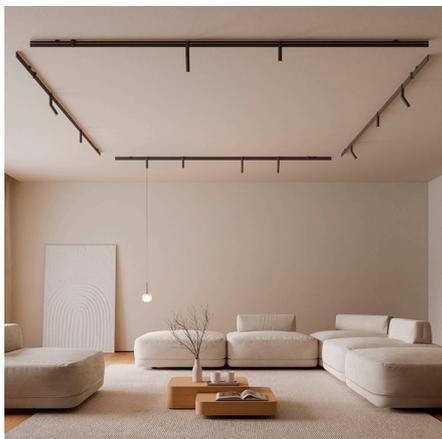

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K

Control

CASAMBI / PUSH 1-10V DALI
CASAMBI / PROTOPIXEL

Electrical connection To track

Light source

1 x LED 4.3W 250 mA

LED

CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver

250 mA 48 V



Application

Hanging


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 0.68 kg
Net weight 0.18 kg
Vol. 0.0033 m³



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

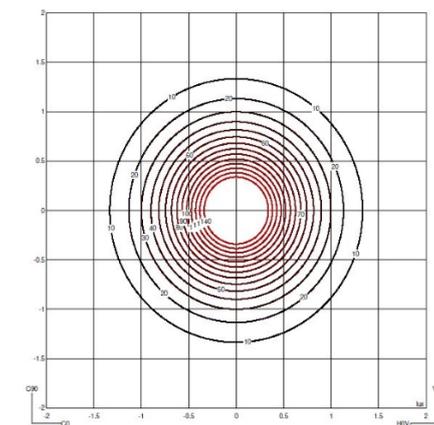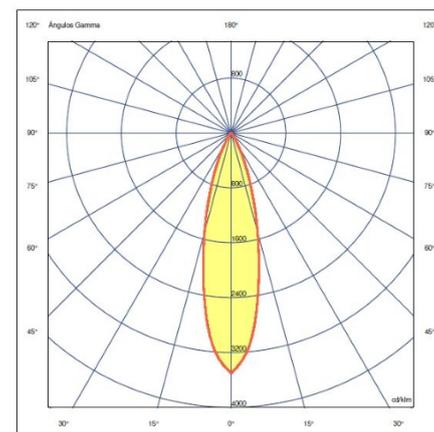

Efficiency

75.909 lm/W

Coordinate System

CG

Total Flux

334.0 lm

Maximum Value

3500.41 cd/klm