



Design By Martín Azúa

The Bind spotlight offers soft contrasts, flooding the space from above, thanks to a generous diameter and a wider light gradient.

Model Sheet



Ø 18,5 cm

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

● 04 Black
NCS S 8500N

● 24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

PROTOPIXEL / PUSH 1-10V DALI
CASAMBI / CASAMBI

Electrical connection To track

Light source

1 x LED 13W 700 mA



LED

CRI>90 1395 lm 107,3
2700 K / 3000 K / 3500 K / Tunable White

Driver

700 mA 48 V

◊ F / ~~X~~ Dimmable LED IP20

Application

Hanging

Packaging

1 Box
0.21 m x 0.2 m x 0.13 m
Gross weight 1.5 kg
Net weight 1 kg
Vol. 0.0054 m³



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

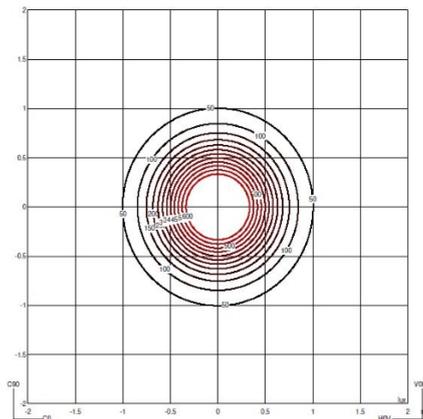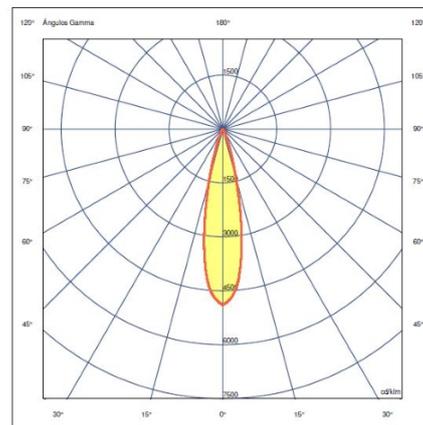

Efficiency 78.923 lm/W
Coordinate System CG
Total Flux 1026.0 lm
Maximum Value 4893.78 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty