


FLINDT BOLLARD

The bollard emits a wide downward directed glare-free light. The light source rests at the top inside the asymmetric carving on the side of the bollard, where the gradient serves as a reflector that softens the light and forms a pleasant organic shape on the ground below.



Christian Flindt

Christian Flindt (1972-) graduated with an MAA and MDD from Aarhus School of Architecture in 2002. He then started his own design company in 2003. Here, he placed high emphasis on communication between people, and his focus on this area finds expression in his approach to re-evaluating furniture.

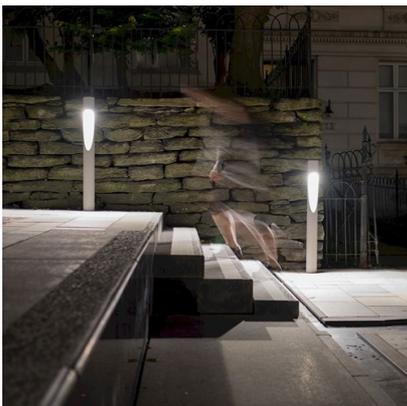

Johanneskirke-trappen



Strandengen, Søndre Havn - Køge Kyst

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

The bollard is equipped with 2 pcs LED's for maximizing the vertical light distribution. Delivered with integrated Surge Protection Device (SPD). Please contact Louis Poulsen for 2700K.

Mounting

Terminal block position: In the top. Looping: Approved, max. 5x6 mm². Driver position: In the top. Post dia. Ø115 mm. Post f/in ground installation: H: 1700mm incl. fixture head, in ground part 600 or 900 mm. Post w/anchorage unit: H: 1110/1410 mm incl. fixture head, in ground anchorage unit 310 mm. Post w/base plate for surface mounting: H 800/1100 mm incl. fixture head. Post dia.

Finish

Aluminium, Corten, or Black coloured. Textured surface, powder coated.

Materials

Top: Cast aluminium. Reflector part: Cast aluminium. Post: Extruded aluminium. Base plate: Cast aluminium.

Sizes and weights

width x Height x Length (mm) | 115 x 1100 x 115 Max 10.4 kg | 115 x 800 x 115 Max 7.2 kg

Class

Ingress protection IP65. Electric shock protection I w. ground, II w/o ground. IK10.

Specification notes


The LED driver is integrated in the fixture head. All LED efficiency information are measured as system power.

Light source


LED 3000K 12W
Lumen: 671

Information

The bollard is equipped with 2 pcs LED's for maximizing the vertical light distribution. Delivered with integrated Surge Protection Device (SPD). Please contact Louis Poulsen for 2700K.

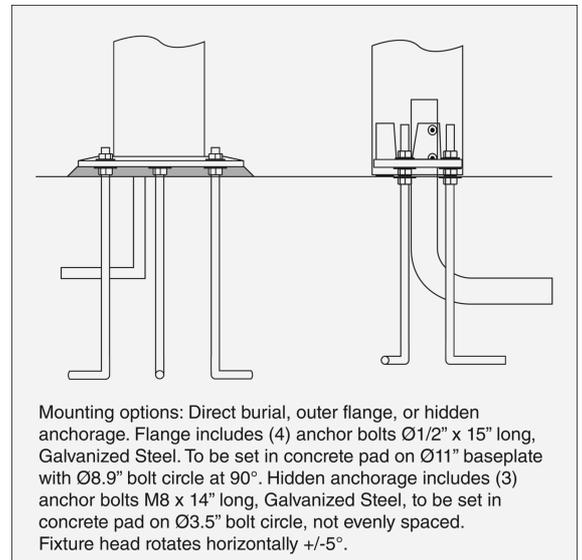


Related products



Flindt Wall Lamp



Flindt Garden Bollard



Flindt Plaza

Product variants

Dimension	Colour	Mounting	Light source	Lumen	Class	Lighting control
1100mm	● Aluminium colour texture	Base	LED 3000K 12W	576	I	Dac: dali + clo
800mm	● Black texture ● Corten colour	Post f/in-ground installation	LED 4000K 12W	592	II	Dpc: nightdim + clo
		Post w/anchorage unit		622		
		Post w/base plate		640		
				671		
				690		

Design

Christian Flindt

Weight

Min: 10.351 kg Max: 8.547 kg

Dimensions


1100mm, 800mm

Finish


Aluminium colour texture, Black texture, Corten colour

Light distribution diagrams

Cartesian

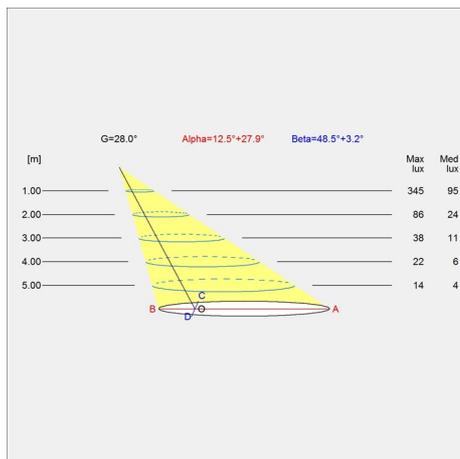

Isolux

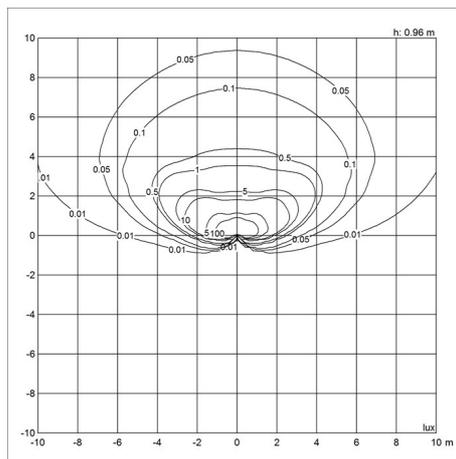

Polar

