

FLINDT GARDEN BOLLARD

The garden bollard emits a wide downward directed glare-free light. The light source rests at the top inside the asymmetric carving on the side of the bollard, where the gradient serves as a reflector that softens the light and forms a pleasant organic shape on the ground below.



Christian Flindt

Christian Flindt (1972-) graduated with an MAA and MDD from Aarhus School of Architecture in 2002. He then started his own design company in 2003. Here, he placed high emphasis on communication between people, and his focus on this area finds expression in his approach to re-evaluating furniture.



**louis
poulsen**

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Flindt Garden with an integrated driver (230V) contains a fixture with an integrated driver and DALI. A mounting fixture is available as a spare part. Flindt Garden without an adapter (24V) contains a fixture. Adapter and installation cables must be brought separately. Requires installation by a certified electrician. Looping is approved. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED replacement should always be carried out by an authorized electrician.

Mounting

Flindt Garden is available in a 24V – and 230V version. Flindt Garden with an integrated driver (230V) is available with a baseplate and anchor mounting. A mounting fixture is available as a spare part. Flindt Garden without an adapter (24V) must be connected to an external adapter. The adapter must be brought separately. A maximum of 6 Garden bollards (6,5 W) can be run by one adapter. The maximum distance to the last bollard is 30 m. Stem: Ø50 mm. Mounting principle for Flindt Garden (24V). Spike mounting: Put the bollard with the spike into the ground and let the cable run over the ground. The bollard is connected to the adaptor with the enclosed 5 m. cable and T-connector. Plug-and-Play. Anchor mounting: Anchor unit to be fixed in concrete. Use installation cables for in-ground installation for legal fixed installation. Looping is approved. Requires installation by a certified electrician. Baseplate mounting: Mounting on a surface. Use installation cables for in-ground installation for legal fixed installation. Looping is approved. Requires installation by a certified electrician.

Finish

Aluminium, Corten, or Black coloured. Textured surface, powder coated.

Materials

Top: Cast aluminium. Reflector part: Cast aluminium. Post: Extruded aluminium. Base plate: Cast aluminium.

Sizes and weights

width x Height x Length (mm) | 50 x 348 x 50 Max 2.4 kg | 50 x 610 x 50 Max 1.4 kg | 50 x 698 x 50 Max 2.0 kg | 50 x 960 x 50 Max 1.7 kg

Class


Ingress protection w/spike: IP 65. Ingress protection w/anchor: IP 65 (Head), IP44 (Anchor). Ingress protection w/base plate: IP 65 (Head), IP44 (Baseplate). Electric shock protection III. IK06

Light source

LED 2700K 6.5W
Lumen: 252

Information

Flindt Garden with an integrated driver (230V) contains a fixture with an integrated driver and DALI. A mounting fixture is available as a spare part. Flindt Garden without an adapter (24V) contains a fixture. Adapter and installation cables must be brought separately. Requires installation by a certified electrician. Looping is approved. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED replacement should always be carried out by an authorized electrician.

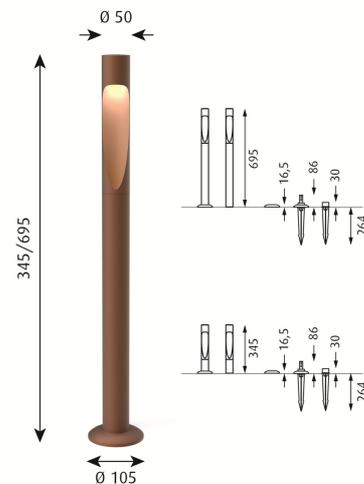

Related products



Flindt Bollard



Flindt Wall Lamp



Flindt Plaza

Product variants

Dimension	Colour	Mounting	Light source	Lumen	Class	Lighting control
LONG	● Aluminium colour texture	Anchor w/int driver	LED 2700K 6.5W	200	-	-
SHORT	● Black texture	Anchor wo/adaptor	LED 2700K 8.8W	215	I	Dali
	● Corten colour	Base w/int driver	LED 3000K 6.5W	231	III	
		Base wo/adaptor	LED 3000K 8.8W	248		
		Spike w/o adap w/connector	LED 4000K 8.8W	252		
			291			

Design

Christian Flindt

Weight

Min: 0.95 kg Max: 2.35 kg

Dimensions

LONG, SHORT

Finish


Aluminium colour texture, Black texture, Corten colour

Voltage


230V, 24V

Light distribution diagrams


Cartesian

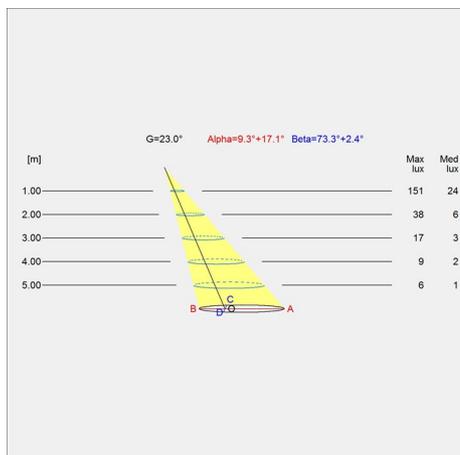

Isolux

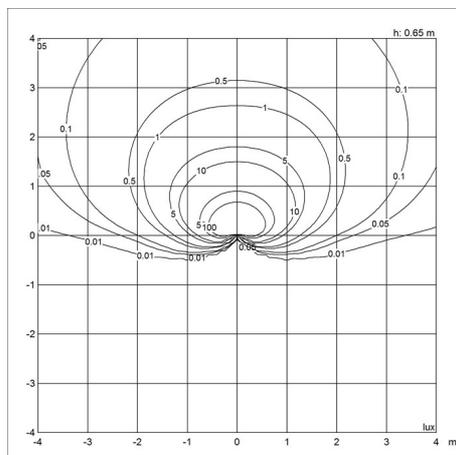

Polar

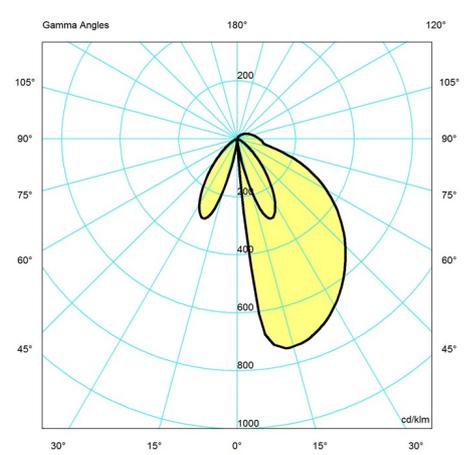

Spare parts & accessories

Product	Variant number
T-Connector for Spike-Mount Garden Bollards	5747405303
Garden adapterbox cable 3x1	5747407039