

# HOMANN PARK

The fixture provides direct downward illumination and is self-illuminating. The fixture is available in two variants; an upright and a no upright version. Light distribution round symmetrical (T5) or asymmetrical (T3). It emphasizes the shape of the luminaire and creates ambience and comfort.



## Alfred Homann

Alfred Homann grew up in South Zealand, Denmark. In 1976, he graduated as an architect from the Royal Danish Academy of Fine arts in Copenhagen.



## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

Integrated Surge Protection. LED replacement kit available. Dimming options: DALI, CLO, and night time dimming (default setting: 50% power in 8 hours). Urban Comfort comes with prismatic diffuser. Please contact Louis Poulsen for 2700K and Ø76mm stub, and for more info about supported Light Management Systems

### Mounting

Pole dimension: Ø 60 mm. Transition piece available for pole Ø 76 mm and Ø 115 mm. Installation cable: 4m 5x1mm<sup>2</sup> (Class I) or 4m 4x1mm<sup>2</sup> (Class II). Driver and plug for easy maintenance placed inside the post top.

### Finish

Natural painted aluminum, powder coated.

### Materials

Lower diffuser: Injection molded opal acrylic. Lower glass: Plate of clear polycarbonate. Upper diffuser: Injection molded opal acrylic. Housing: Die cast aluminum. Base: Die cast aluminum.

### Sizes and weights

width x Height x Length (mm) | 392 x 100 x 567 Max 7.5 kg | 392 x 100 x 678 Max 10.9 kg

### Class

Ingress protection IP66. Electric shock protection I w. ground, II w/o ground. IK10.


### Light source

LED 3000K  
Lumen: 1746

### Information

Integrated Surge Protection. LED replacement kit available. Dimming options: DALI, CLO, and night time dimming (default setting: 50% power in 8 hours). Urban Comfort comes with prismatic diffuser.

Please contact Louis Poulsen for 2700K and Ø76mm stub, and for more info about supported Light Management Systems

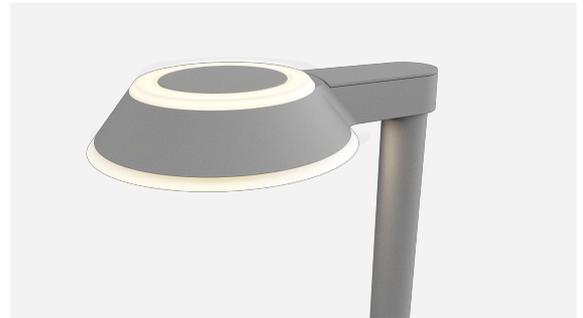

## Product variants

Mounting	Light source	Lumen	Class	Light technique	Shade	Lighting control
Ø 60 pole	LED 3000K	1742	I	ASYM 2H	No Uplight	Hi dac: dali + clo
Side-mounted	LED 4000K	1746	II	PRISMATIC (URBRAN COMFORT)	Uplight	Hi dpc: nightdim + clo
		1751				Li dac: dali + clo
		1837				Li dpc: nightdim + clo
		1839				Sr 2xzhaga ct clo hi
		1866				
		1871				
		1876				
		3143				
		3145				
		3148				
3153						
3368						
3370						
3373						
3378						

# Design

Alfred Homann

# Weight


Min: 10.799 kg Max: 7.761 kg

# Finish


Aluminium colour texture

# Light distribution diagrams


Cartesian

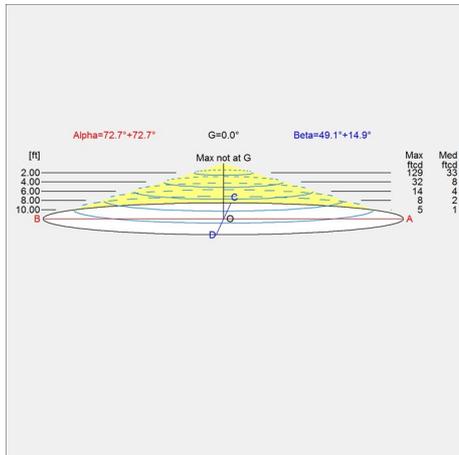

Isolux

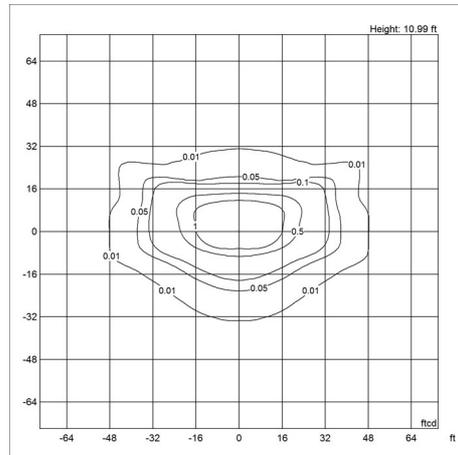

Polar

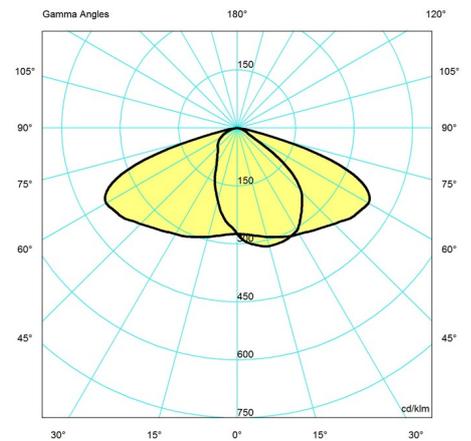

# Spare parts & accessories

**Product**

TRANS.PIECE POLE Ø114/76 GALV  
 TRANS.PIECE F/POLE Ø114/60 GALV

**Variant number**

5747826872  
 5747826885