


LP 045 RECESSED

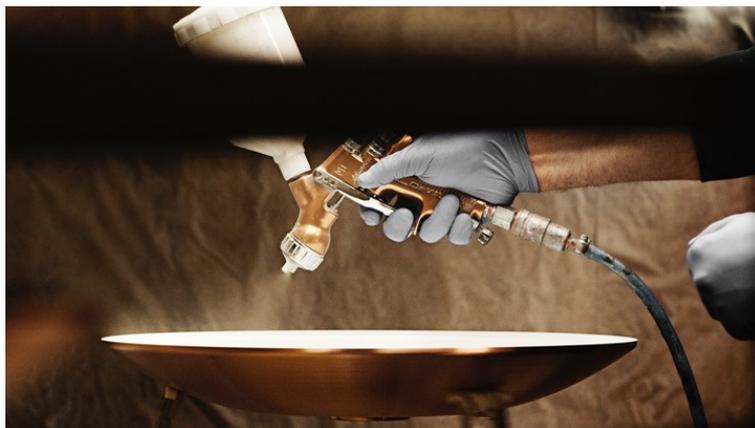

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Ø75: The fixture head is fixed. Ø90: The fixture head is 30 degree adjustable and 360 degree rotatable. The product includes the driver as a separate unit with a looping box and pre-installed. Controlable by DALI, Wireless Bluetooth, ON-OFF, and Mains dimming are available. Available with spot, medium, and flood optics.

Finish

White or Black. Powder coated. Anti-glare ring is black on all variants.

Materials

Body: Aluminium. Reflector: Plastic.

Sizes and weights

width x Height x Length (mm) | 75 x 78 x 75 Max 1.9 kg | 90 x 83 x 90 Max 0.4 kg

Class


Ingress protection IP20. Electric shock protection II.

Light source

LED 2700K 11W
Lumen: 700

Information

Ø75: The fixture head is fixed. Ø90: The fixture head is 30 degree adjustable and 360 degree rotatable. The product includes the driver as a separate unit with a looping box and pre-installed. Controlable by DALI, Wireless Bluetooth, ON-OFF, and Mains dimming are available. Available with spot, medium, and flood optics.

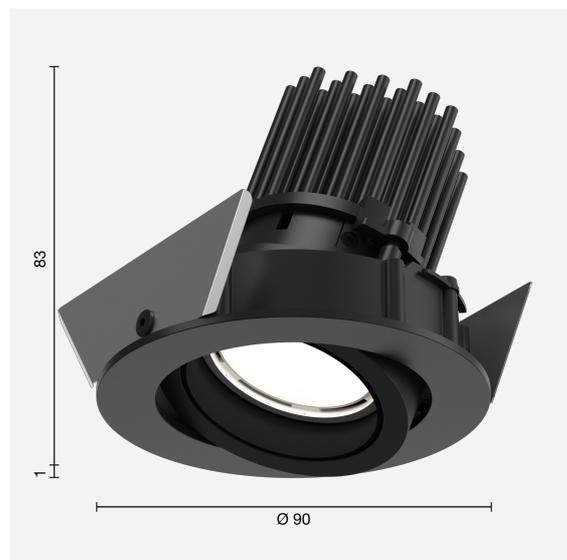

Related products



LP 072 Track



LP 070 Recessed



LP 051 Semi-Recessed



LP 051 Track



LP 051 Surface



LP 051 Recessed



LP 072 Semi-Recessed

Product variants

Dimension	Colour	Mounting	Light source	Lumen	Reflector	Lighting control
Ø75	● Black	Adjustable recessed	LED 2700K 11W	411	Flood 56°	Dali
Ø90	○ White	Fixed recessed	LED 2700K 6.5W	421	Medium 27°	On/off
			LED 3000K 11W	441	Spot 20°	Phase dimming (mains dimm)
			LED 3000K 6.5W	443		Wireless bluetooth
			LED 4000K 11W	455		
			LED 4000K 6.5W	474		
				476		
				486		
	509					
	652					
	668					
	700					
	701					
	718					
	746					
	753					
	764					
	801					

Design

Louis Poulsen

Weight

Min: 0 kg Max: 1.92 kg

Dimensions


Ø75, Ø90

Finish


Black, White

Light distribution diagrams

Cartesian

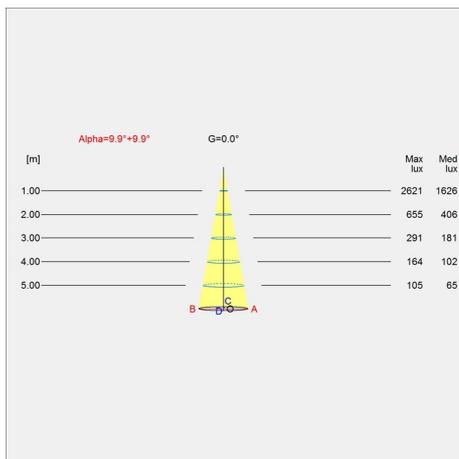

Isolux

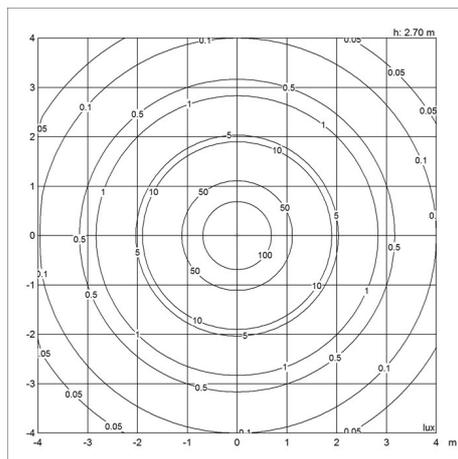

Polar

