


# LP 070 RECESSED

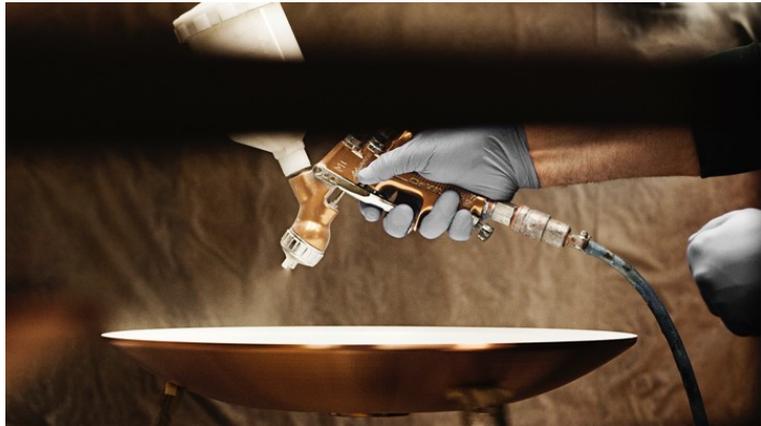

## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

The fixture head comes as fixed and as wall washer. The product includes the driver as a separate unit with a looping box and pre-installed. Controlable by DALI, Wireless Bluetooth, ON-OFF, and Mains dimming are available. Available with spot, medium, and flood optics.

### Finish

White or Black. Powder coated. Anti-glare ring is black on all variants.

### Materials

Reflector: Injected aluminium.

### Sizes and weights

width x Height x Length (mm) | 90 x 108 x 80 Max 0.5 kg | 90 x 102 x 102 Max 0.5 kg

### Class

Ingress protection IP20. Electric shock protection II.

### Light source

LED 2700K 11W  
Lumen: 651

### Information

The fixture head comes as fixed and as wall washer. The product includes the driver as a separate unit with a looping box and pre-installed. Controlable by DALI, Wireless Bluetooth, ON-OFF, and Mains dimming are available. Available with spot, medium, and flood optics.



## Related products



LP 045 Recessed



LP 072 Track



LP 051 Track



LP 051 Surface



LP 051 Recessed



LP 051 Semi-Recessed



LP 072 Semi-Recessed

## Product variants

Dimension	Colour	Cable type	Light source	Lumen	Light technique	Reflector	Lighting control
Ø80	● Black	-	LED 2700K 11W	385	-	Flood 46°	Dali
		With cord	LED 2700K 6.5W	409	ASYM	Medium 25°	On/off
	○ White	With cord	LED 3000K 11W	412	SYMMETRIC	Spot 19°	Phase dimming (mains dimm)
			LED 3000K 6.5W	415			
			LED 4000K 11W	429			
			LED 4000K 6.5W	431			
				432			
				441			
				444			
				445			
				459			
				461			
	463						
	465						
	475						
	479						
	482						
	488						
	494						
	495						
	496						
	497						
	518						
	521						
	527						
	528						
	530						
	553						
	556						
	557						
	563						

## LP 070 Recessed

Dimension	Colour	Cable type	Light source	Lumen	Light technique	Reflector	Lighting control
				604			
				624			
				636			
				644			
				649			
				651			
				671			
				672			
				691			
				692			
				700			
				713			
				718			
				720			
				721			
				723			
				736			
				744			
				753			
				757			
				758			
				762			
				767			
				769			
				771			
				774			
				810			
				814			
				815			
				820			
				821			
				823			
				861			
				865			
				866			
				872			

# Design

Louis Poulsen

# Weight

Min: 0 kg Max: 0.45 kg

# Dimensions


Ø80

# Finish


Black, White

# Light distribution diagrams

## Cartesian

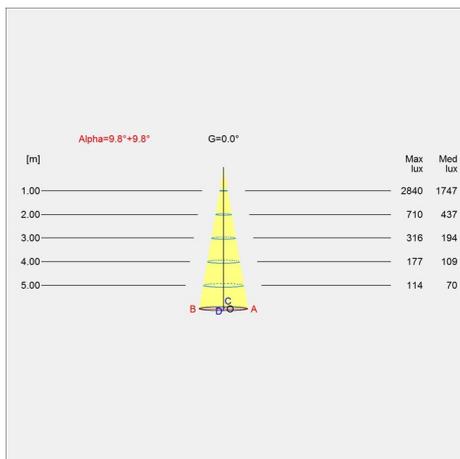

## Isolux

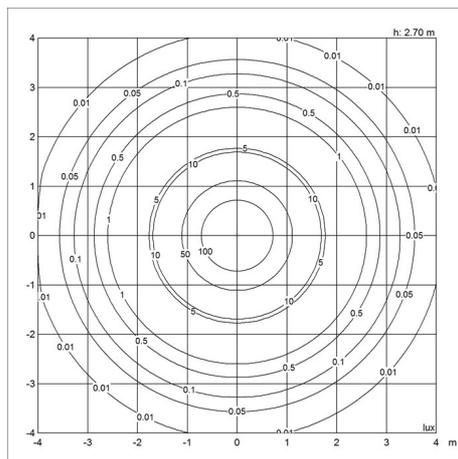

## Polar

