

# LP 072 TRACK



## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

The fixture head is 90 degree adjustable and 360 degree rotatable. The product contains an integrated driver. Controllable by DALI, Wireless Bluetooth, ON-OFF, and Mains dimming are available. Available with spot, medium, and flood optics.

### Finish

White or Black. Powder coated. Anti-glare ring is black on all variants.

### Materials

Body: Aluminium. Reflector: Plastic.

### Sizes and weights

width x Height x Length (mm) | 105 x 173 x 205 Max 0.8 kg | 105 x 173 x 195 Max 0.8 kg | 105 x 170 x 165 Max 0.8 kg

### Class


Ingress protection IP20. Electric shock protection II.

### Light source

LED 2700K 25W  
Lumen: 2177

### Information

The fixture head is 90 degree adjustable and 360 degree rotatable. The product contains an integrated driver. Controllable by DALI, Wireless Bluetooth, ON-OFF, and Mains dimming are available. Available with spot, medium, and flood optics.

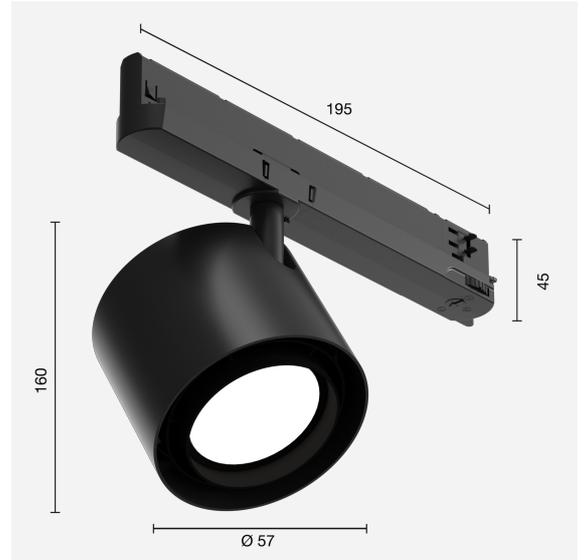

## Related products



LP 070 Recessed



LP 045 Recessed



LP 051 Recessed



LP 051 Semi-Recessed



LP 051 Track



LP 051 Surface



LP 072 Semi-Recessed

## Product variants

Dimension	Colour	Light source	Lumen	Reflector	Lighting control	
Ø 165	● Black	LED 2700K 25W	2168	Flood 45°	Dali	
		○ White	LED 2700K 38W	2177	Medium 28°	On/off
			LED 3000K 25W	2195	Spot 19°	Wireless bluetooth
			LED 3000K 38W	2204		
			LED 4000K 25W	2391		
			LED 4000K 38W	2400		
			2524			
		2555				
		2782				
		3026				
		3033				
		3042				
	3049					
	3380					
	3388					
	3483					
	3502					
	3892					

# Design

Louis Poulsen

# Weight

Min: 0 kg Max: 0.81 kg

# Dimensions


Ø 165

# Finish


Black, White

# Light distribution diagrams

Cartesian

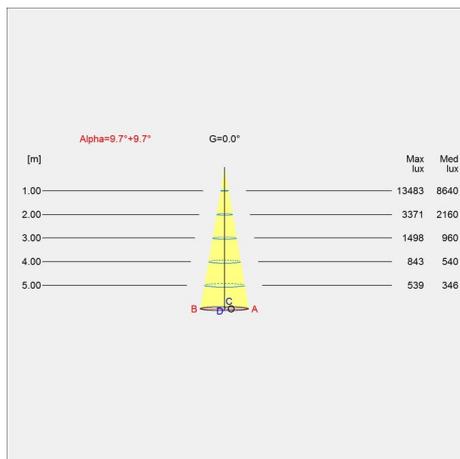

Isolux

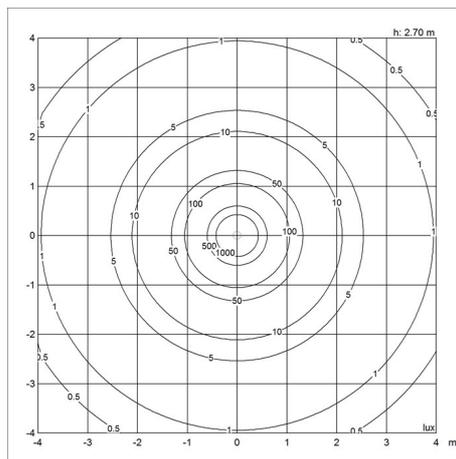

Polar

