


LP LIN25 SURFACE

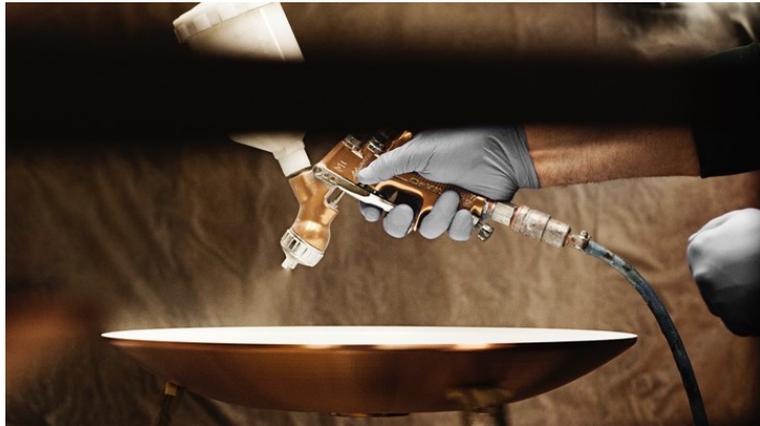

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

This fixture can be suspended by using the suspension kits. Please follow the "Linear scheme Guide".... to configure your product. Max length is 8m.

Finish

White or Black. Powder coated.

Materials

Profile: Injected aluminium.

Sizes and weights

width x Height x Length (mm) | 25 x 30 x 1000 Max 3.1 kg | 25 x 30 x 1500 Max 1.5 kg | 25 x 30 x 2000 Max 2.1 kg | 25 x 30 x 2500 Max 2.6 kg

Class


Ingress protection IP20. Electric shock protection II.

Light source

LED 2700K 19W
Lumen: 988

Information

This fixture can be suspended by using the suspension kits. Please follow the "Linear scheme Guide".... to configure your product. Max length is 8m.

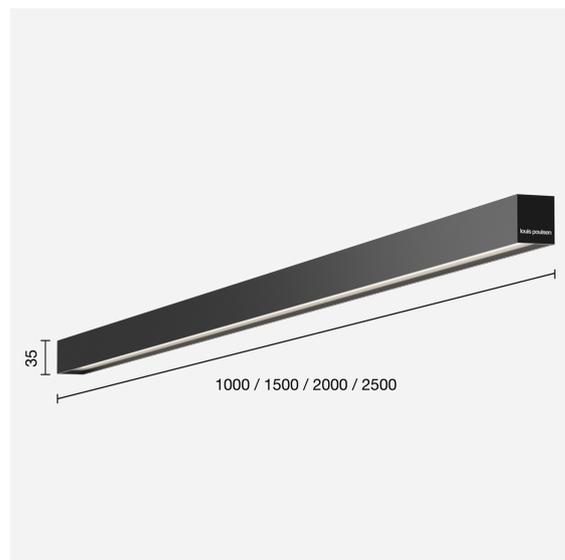

Product variants

Dimension	Colour	Light source	Lumen	Lighting control
1000mm	<input checked="" type="radio"/> Black	LED 2700K 19W	1008	Dali
1500	<input type="radio"/> White	LED 2700K 29W	1053	On/off
2000		LED 2700K 39W	1483	Wireless bluetooth
2500		LED 2700K 49W	1513	
		LED 3000K 19W	1579	
		LED 3000K 29W	1978	
		LED 3000K 39W	2017	
		LED 3000K 49W	2105	
		LED 4000K 19W	2471	
		LED 4000K 29W	2521	
		LED 4000K 39W	2631	
		LED 4000K 49W	988	

Design

Louis Poulsen

Weight

Min: 1.4 kg Max: 3.12 kg

Dimensions


1000mm, 1500, 2000, 2500

Finish


Black, White

Light distribution diagrams

Cartesian

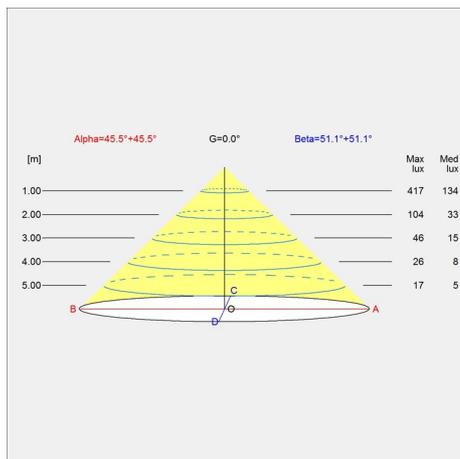

Isolux

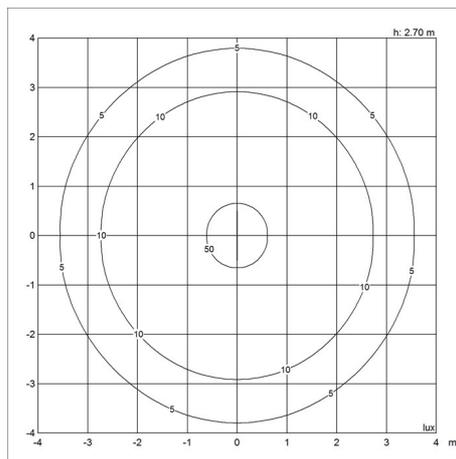

Polar

