

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.



Luminaire finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

LED colour temperature

2700 K / 3000 K / 3500 K.

Dimming control options

On/ Off;
Simultaneous line DALI;
1-10V; Push; Casambi;
ProtoPixel; Casambi (P2P);
ProtoPixel (P2P).

Electrical connection options

Surface
Built-in
Remote
Plug

Belt

Polyester.

- Black
- Beige
- Terra Red
- Blue
- Green

Remarks


Maximum 60 meters length per electrical connection point.

Fire Hazard Testing. GW-960.
Fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

Installation and assembly:

Please, see the installation manual.

www.vibia.com ► **Professional area**
and together with the product you'll receive a personalized installation guide with all the details of your composition and guidance for its correct and easy installation.

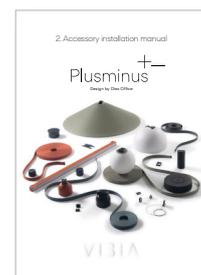

Sphere

Volumetric Diffuser




Ø 20 cm
6230



Ø 30 cm
6235

6230



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7,9 W 450mA. E →
846 lm. 107,09 lm/W.

Packaging


1 Box
0,26 x 0,26 x 0,26 m.
Vol. 0,0175 m³.
Gross weight 1,56 Kg.
Net weight 0,93 Kg.

Dimming control

6230_/_/0 On/ Off
6230_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi
6230_/_/Z Casambi integrated on each
individual luminaire (P2P)



6235

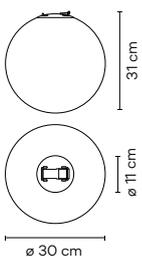

Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source


/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 16 W 850mA. F →
1492 lm. 93,25 lm/W.

Packaging

1 Box
0,364 x 0,364 x 0,364 m.
Vol. 0,0482 m³.
Gross weight 2,50 Kg.
Net weight 1,80 Kg.

Dimming control

6235_/_/0 On/ Off
6235_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi
6235_/_/Z Casambi integrated on each
individual luminaire (P2P)

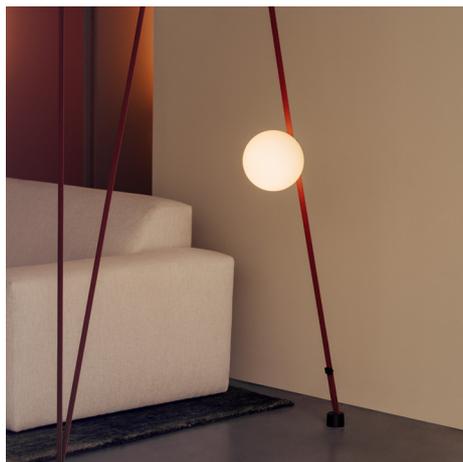

Semisphere

Hidden Diffuser




Ø 20 cm
6220



Ø 30 cm
6225

6220



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7,9 W 450mA. **E**
846 lm. 107,09 lm/W.

Packaging


1 Box
0,26 x 0,26 x 0,26 m.
Vol. 0,0175 m³.
Gross weight 1,20 Kg.
Net weight 0,78 Kg.

Dimming control

6220_/_0 On/ Off
6220_/_F Simultaneous line
DALI, 1-10V, Push, Casambi
6220_/_Z Casambi integrated on each
individual luminaire (P2P)



6225



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source


/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 16 W 850mA. **F**
1492 lm. 93,25 lm/W.

Packaging

1 Box
0,364 x 0,364 x 0,364 m.
Vol. 0,0482 m³.
Gross weight 2 Kg.
Net weight 1,5 Kg.

Dimming control

6225_/_0 On/ Off
6225_/_F Simultaneous line
DALI, 1-10V, Push, Casambi
6225_/_Z Casambi integrated on each
individual luminaire (P2P)

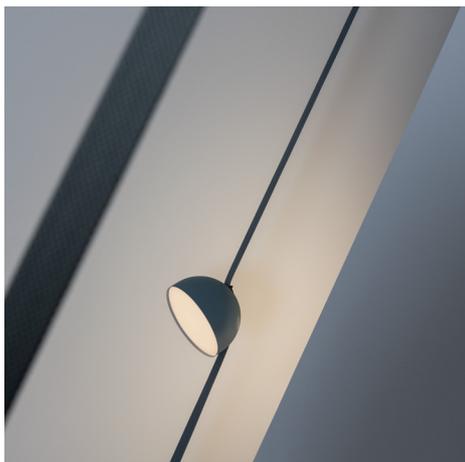

Cone

Hidden Diffuser




Ø 60 cm
6240



Ø 80 cm
6245

6240



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 16 W 850mA. 
1492 lm. 93,25 lm/W.

Packaging


1 Box
0,727 x 0,727 x 0,32 m.
Vol. 0,1691 m³.
Gross weight 5 Kg.
Net weight 2,5 Kg.

Dimming control

6240_/_0 On/ Off
6240_/_F Simultaneous line
DALI, 1-10V, Push, Casambi
6240_/_Z Casambi integrated on each
individual luminaire (P2P)

6245

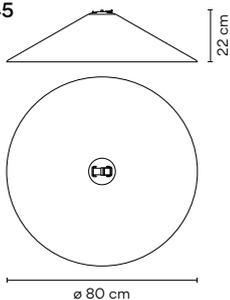

Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 16 W 850mA. 
1492 lm. 93,25 lm/W.


Packaging

1 Box
0,96 x 0,96 x 0,27 m.
Vol. 0,2488 m³.
Gross weight 7 Kg.
Net weight 3,5 Kg.

Dimming control

6245_/_0 On/ Off
6245_/_F Simultaneous line
DALI, 1-10V, Push, Casambi
6245_/_Z Casambi integrated on each
individual luminaire (P2P)

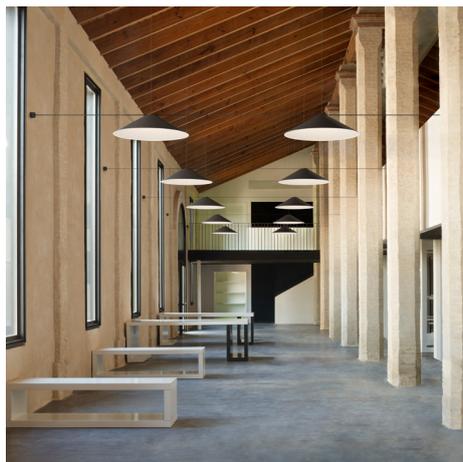

Spotlight

Accent light



Narrow



6200




Ø 10 cm
6200

Medium



6205

Wide




6210



Ø 10 cm
6205 6210

6200

Narrow 15°



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED 7,9 W 450mA. 916 lm. 115,95 lm/W.

Packaging

1 Box
0,193 x 0,161 x 0,148 m.
Vol. 0,0046 m³.
Gross weight 0,719 Kg.
Net weight 0,51 Kg.


Dimming control

6200_/_/0 On/ Off
6200_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi
6200_/_/Z Casambi integrated on each individual luminaire (P2P)



6205

Medium 24°



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED 7,9 W 450mA. 916 lm. 115,95 lm/W.

Packaging

1 Box
0,193 x 0,161 x 0,148 m.
Vol. 0,0046 m³.
Gross weight 0,719 Kg.
Net weight 0,51 Kg.


Dimming control

6205_/_/0 On/ Off
6205_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi
6205_/_/Z Casambi integrated on each individual luminaire (P2P)



6210

Wide 55°



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED 7,9 W 450mA. 916 lm. 115,95 lm/W.

Packaging

1 Box
0,193 x 0,161 x 0,148 m.
Vol. 0,0046 m³.
Gross weight 0,719 Kg.
Net weight 0,51 Kg.



Dimming control

6210_/_/0 On/ Off
6210_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi
6210_/_/Z Casambi integrated on each individual luminaire (P2P)



Spotlight


Flat diffuser



Ø 10 cm
6215

6215

Flat diffuser



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source


/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 4,2 W 250mA.
491 lm. 116,9 lm/W.

Packaging

1 Box
0,193 x 0,161 x 0,148 m.
Vol. 0,0046 m³.
Gross weight 0,719 Kg.
Net weight 0,51 Kg.



Dimming control

6215_/_/0 On/ Off
6215_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi
6215_/_/Z Casambi integrated on each
individual luminaire (P2P)

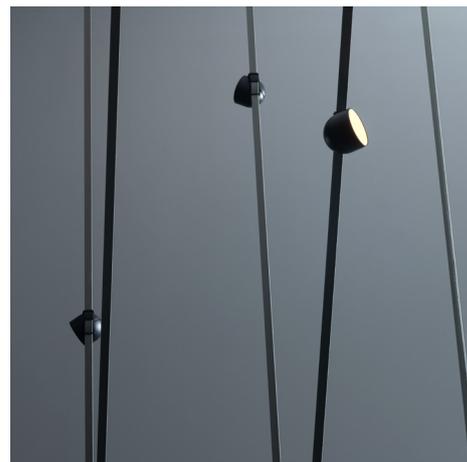


Linear Diffuser

General lighting

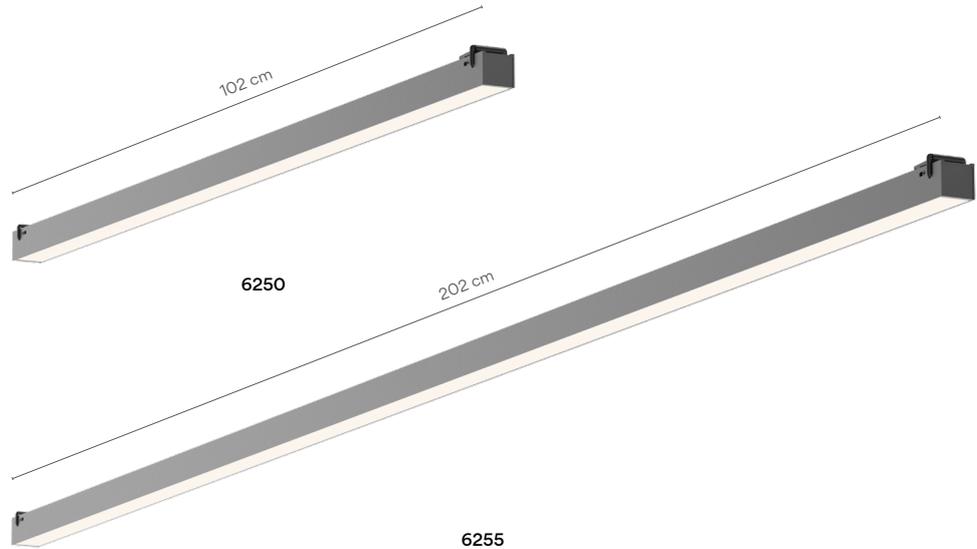

6250



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20,6W 24V.

2544 lm. 123,3 lm/W.

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Packaging

1 Box
0,06 x 0,06 x 1,25 m.
Vol. 0,0057 m³.
Gross weight 1,5 Kg.
Net weight 0,72 Kg.

Dimming control

- 6250_/_/0 On/ Off
- 6250_/_/F Simultaneous line DALI, 1-10V, Push, Casambi
- 6250_/_/Z Casambi integrated on each individual luminaire (P2P)



6255



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41,3 W 24V.

5088 lm. 123,3 lm/W.

Materials



Shade: Aluminum.
Diffuser: Polycarbonate.

Packaging

1 Box
0,06 x 0,06 x 2,24 m.
Vol. 0,0103 m³.
Gross weight 2 Kg.
Net weight 1,45 Kg.


Dimming control

- 6255_/_/0 On/ Off
- 6255_/_/F Simultaneous line DALI, 1-10V, Push, Casambi
- 6255_/_/Z Casambi integrated on each individual luminaire (P2P)

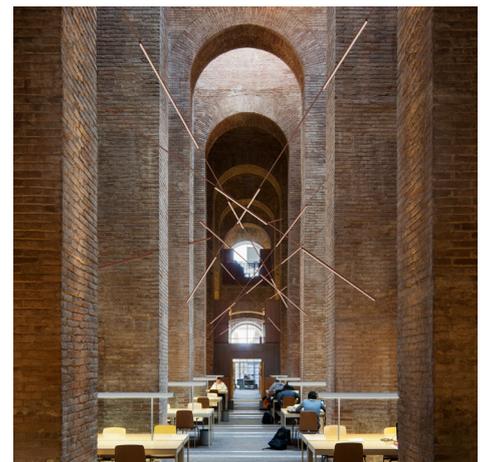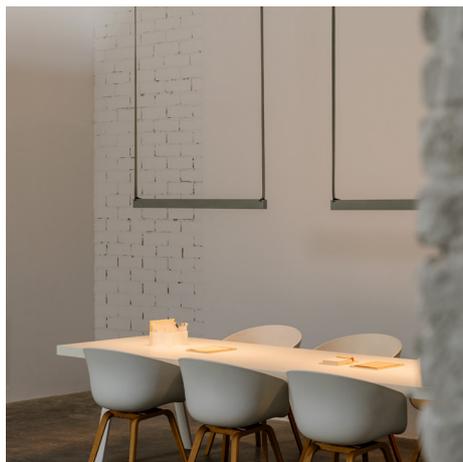


Linear Low UGR - High-Comfort

Linear High Comfort
Low Glare

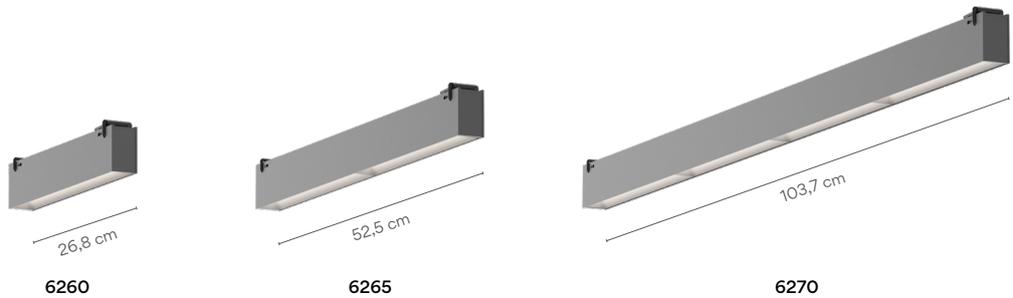

6260



Finishes

-  11 Black (NCS S 8500-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 10,3W 24V. 
1336 lm. 132,43 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
0,08 x 0,11 x 0,32 m.
Vol. 0,0028 m³.
Gross weight 0,8 Kg.
Net weight 0,41 Kg.

Dimming control


6260_/_/0 On/ Off

6260_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi

6260_/_/Z Casambi integrated on each
individual luminaire (P2P)

6265



Finishes

-  11 Black (NCS S 8500-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20,6W 24V. 
2731 lm. 132,3 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
0,08 x 0,11 x 0,57 m.
Vol. 0,0050 m³.
Gross weight 1,5 Kg.
Net weight 0,89 Kg.

Dimming control

6265_/_/0 On/ Off

6265_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi

6265_/_/Z Casambi integrated on each
individual luminaire (P2P)

6270



Finishes

-  11 Black (NCS S 8500-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41,3W 24V. 
5462 lm. 132,3 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
0,08 x 0,11 x 1,10 m.
Vol. 0,0096 m³.
Gross weight 2,5 Kg.
Net weight 1,5 Kg.

Dimming control

6270_/_/0 On/ Off


6270_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi

6270_/_/Z Casambi integrated on each
individual luminaire (P2P)


     

Linear Low UGR - High-Efficiency

Linear High Efficiency
Low Glare

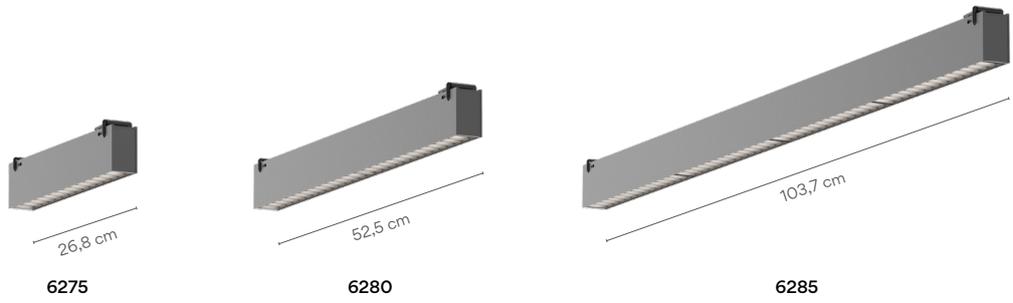

6275



Finishes

-  11 Black (NCS S 8500-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 10,3W 24V. 

1336 lm. 132,43 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
0,08 x 0,11 x 0,32 m.
Vol. 0,0028 m³.
Gross weight 0,8 Kg.
Net weight 0,41 Kg.

Dimming control


6275_/_/0 On/ Off

6275_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi

6275_/_/Z Casambi integrated on each
individual luminaire (P2P)

6280



Finishes

-  11 Black (NCS S 8500-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20,6W 24V. 

2731 lm. 132,3 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
0,08 x 0,11 x 0,57 m.
Vol. 0,0050 m³.
Gross weight 1,5 Kg.
Net weight 0,89 Kg.

Dimming control


6280_/_/0 On/ Off

6280_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi

6280_/_/Z Casambi integrated on each
individual luminaire (P2P)

6285



Finishes

-  11 Black (NCS S 8500-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41,3W 24V. 

5462 lm. 132,3 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
0,08 x 0,11 x 1,10 m.
Vol. 0,0096 m³.
Gross weight 2,5 Kg.
Net weight 1,5 Kg.

Dimming control

6285_/_/0 On/ Off

6285_/_/F Simultaneous line
DALI, 1-10V, Push, Casambi

6285_/_/Z Casambi integrated on each
individual luminaire (P2P)

Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.



Electrical connection options

Choose your preferred installation
option according to your needs.



Surface



Built-in



Remote
Built-in



Surface



Plug



Optional wire
connector

Dimming control options


Choose your preferred installation
option according to your needs.

Dimming Control

Electrical Connection

	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On/ Off	✓	✓	✓	✓
Push Switch	—	—	—	✓
Push Simultaneous	✓	✓	✓	—
1-10V Simultaneous	✓	✓	✓	—
DALI Simultaneous	✓	✓	✓	—
Casambi Simultaneous	✓	✓	✓	✓
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓
ProtoPixel Simultaneous	✓	✓	✓	✓
ProtoPixel integrated on each individual luminaire (P2P)	✓	✓	✓	✓

ProtoPixel products are compatible with
all other DALI-2 products via a designated
gateway (please consult us).




Surface Canopy S
E1 Ø 205 mm.
Wattage options:
<60W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 0,9 Kg.

11 Black
(NCS S 8500-N)




Surface Canopy M
E2 Ø 260 mm.
Wattage options:
>60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 1,8 Kg.

11 Black
(NCS S 8500-N)





Built-in Canopy
E3 Ø 120 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 1,08 - 1,860 Kg.

11 Black
(NCS S 8500-N)

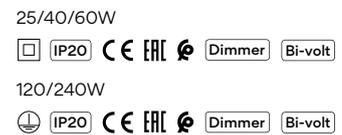



Remote Built-in Canopy
E4 Ø 110 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 0,87 - 1,65 Kg.

11 Black
(NCS S 8500-N)

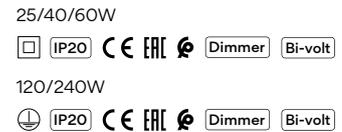



Remote Surface Canopy
E5 Ø 60 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: Aluminum.
Net weight 0,95 - 1,73 Kg.

11 Black
(NCS S 8500-N)

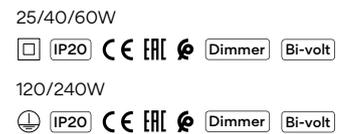


Plug-in Floor Switch
E6 Ø 90 mm.
Wattage options:
<60W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi; ProtoPixel*.
Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.

11 Black
(NCS S 8500-N)



Wire Connector
E8 Ø 3,1 mm.
Wattage options:
< 60W.

Wire connector
E8 Ø 5,8 mm.
Wattage options:
< 60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Body: ABS.

11 Black
(NCS S 8500-N)



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty