


LP SLIM BOX RECESSED

The product family shares a high-efficiency light unit framed in a rectangular housing. The recessed variants emit downwardly directed light, while the suspended and surface-mounted variants provide a combination of primarily downwardly directed and indirect light. Choosing between opal diffusers or micro-prismatic solutions, the glare and visual expression can be balanced as desired. The light egress emphasizes the design detail in the housing, ensuring a comfortable and subtle yet distinct design.

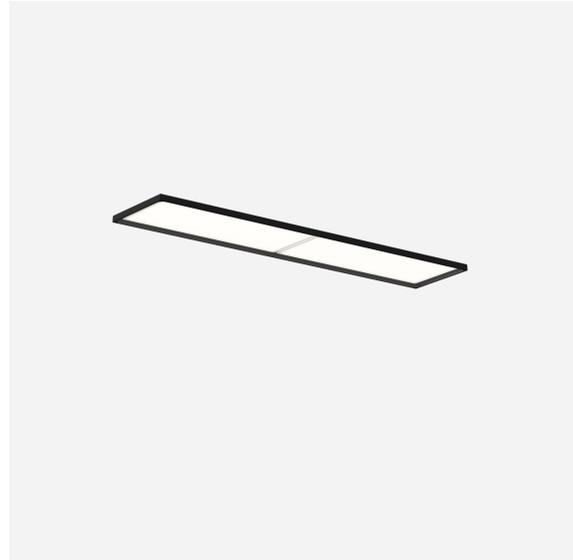

Product info

Mounting

Ceiling thickness: 1–40 mm. Cutout dimensions: 678 x 138 mm. Maximum cutout dimension: 683 x 143 mm. Built-in height: minimum 80 mm. Mounting bracket included. Optional wire for alternative installation. Looping: Approved, max. 5 x 1.5 mm². Integrated driver.

Finish

White or black, powder coated or clear lacquered, pickled aluminium.

Materials

Frame/Housing: Die cast Aluminium, Light Engine bottom: Acrylic (Opal or clear), Light Engine top: Acrylic opal.

Sizes and weights


width x Height x Length (mm) | 150 x 12 x 689 Max 3.8 kg

Class

Ingress protection IP20. Electric shock protection I.

Light source

Lumen: 2373

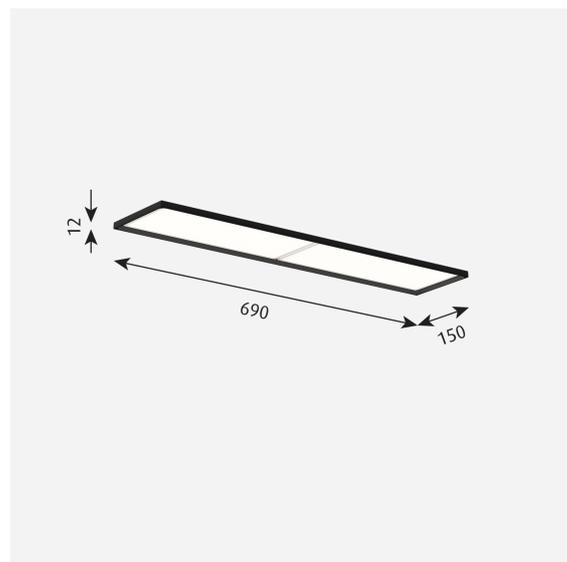

Related products



LP Slim Box Suspended



LP Slim Box Surface Mounted



LP Slim Box Semi-Recessed

Product variants

Colour	Light source	Lumen	Shield	Lighting control
● Black	-	-	MICRO PRISMATIC	Dali
● Dark aluminium raw	LED 3000K 25W	2233	OPAL	Dali high output
○ White	LED 3000K 35W	2288		Wireless bluetooth
	LED 4000K 25W	2290		Wireless bluetooth ho
	LED 4000K 35W	2299		
		2326		
		2373		
		2396		
		2457		
		2546		
		2611		
		3024		
		3235		
		3245		
		3328		
		3471		
		3560		

Design

Louis Poulsen A/S

Weight


Min: 3.306 kg Max: 3.843 kg

Finish


Black, Dark aluminium raw, White

Light distribution diagrams


Cartesian

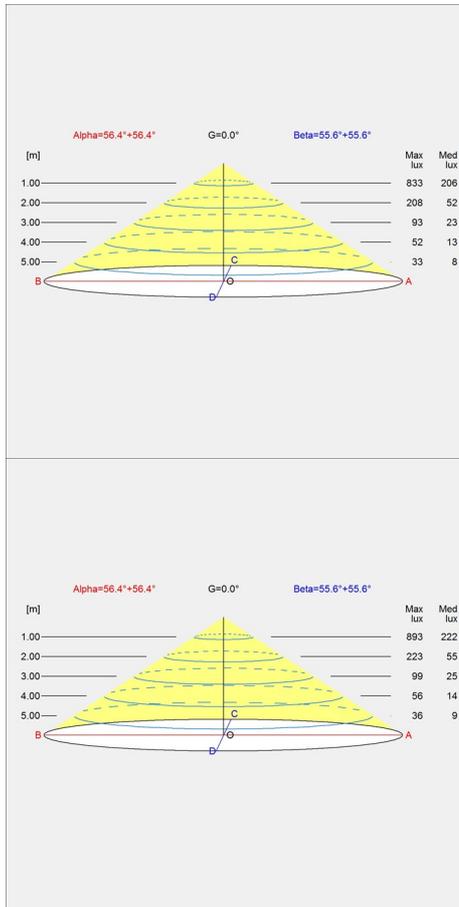


Isolux

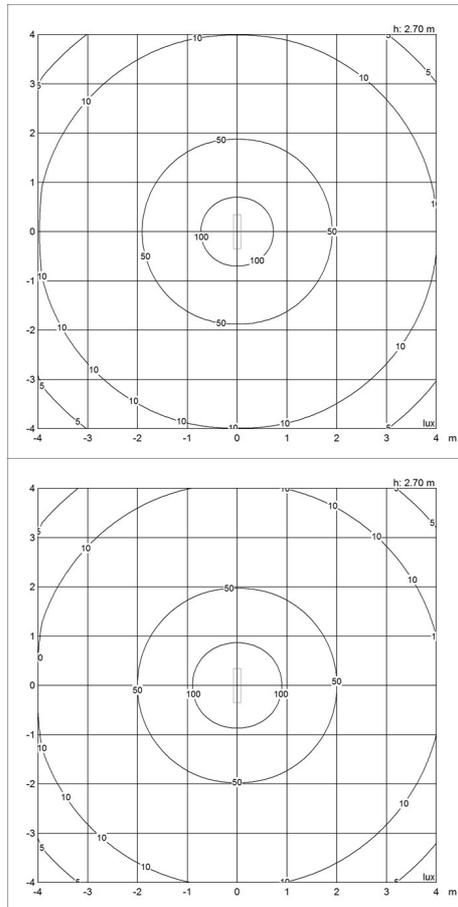


Polar

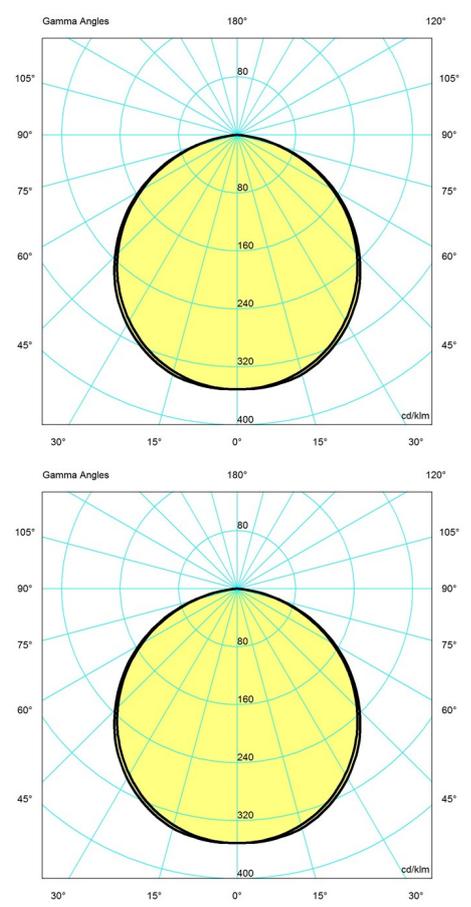


Cartesian

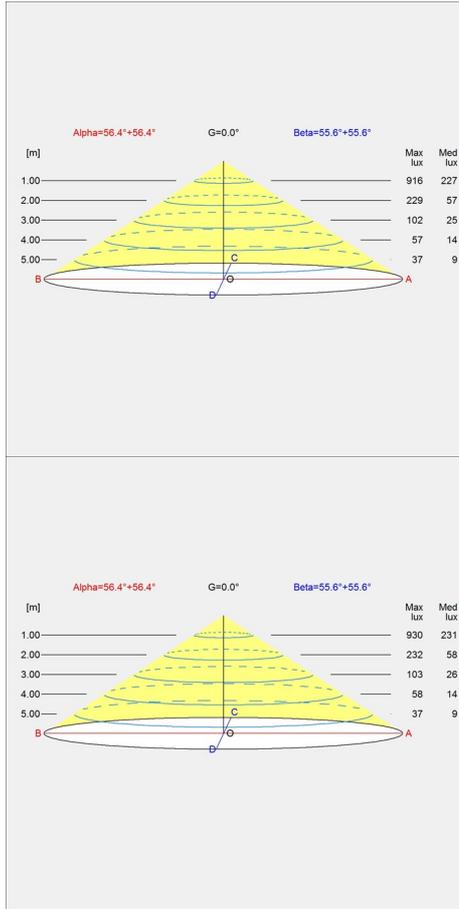

Isolux

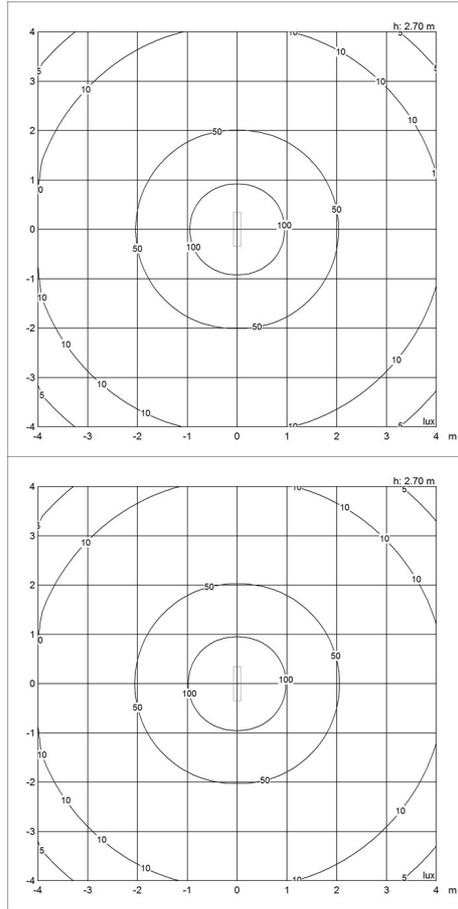

Polar

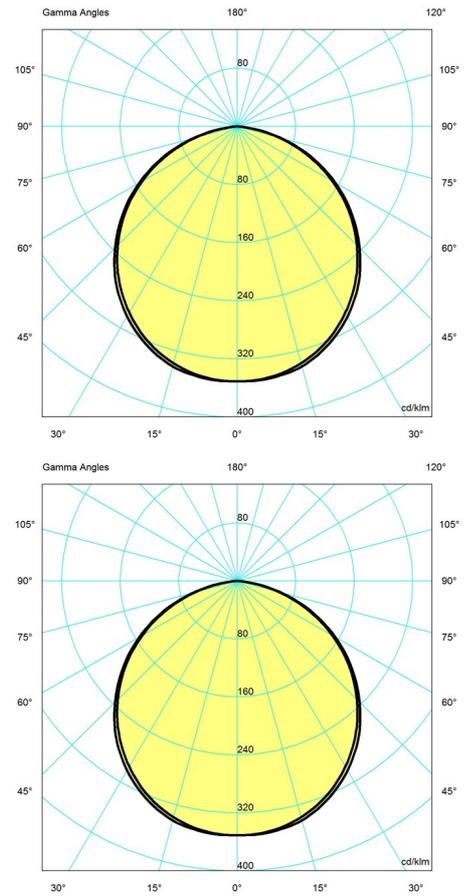

Spare parts & accessories

Product

SLIM BOX REC/SEMI-REC WIRE SET

Variant number

5742588908