

LP SLIM BOX SURFACE MOUNTED

The product family shares a high-efficiency light unit framed in a rectangular housing. The recessed variants emit downwardly directed light, while the suspended and surface-mounted variants provide a combination of primarily downwardly directed and indirect light. Choosing between opal diffusers or micro-prismatic solutions, the glare and visual expression can be balanced as desired. The light egress emphasizes the design detail in the housing, ensuring a comfortable and subtle yet distinct design.



Product info

Mounting

Directly on ceiling or wall. Looping: Approved, max. 5 x 1.5 mm². Integrated driver. Cable entries: Rear, side-mounted. Integrated driver. It can be positioned both vertically and horizontally for wall-mounting.

Finish

White or black, powder coated or clear lacquered, pickled aluminium.

Materials

Frame/Housing: Die cast Aluminium, Light Engine bottom: Acrylic (Opal or clear). Light Engine top: Acrylic opal.

Sizes and weights


width x Height x Length (mm) | 689 x 805 x 150 Max 4.1 kg

Class

Ingress protection IP20. Electric shock protection I.

Light source


Lumen: 2443

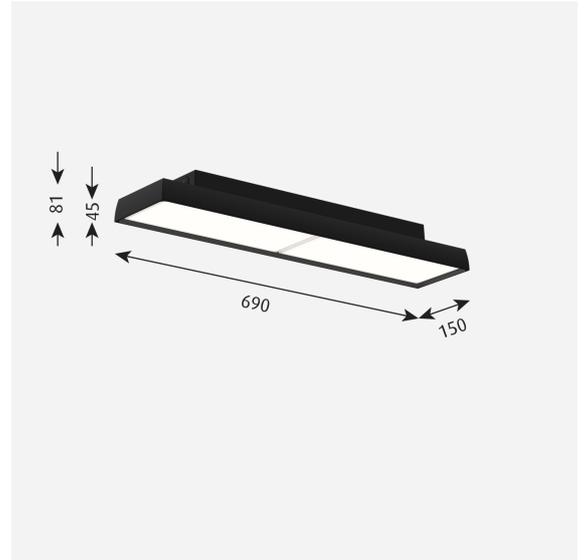

Related products



LP Slim Box Suspended



LP Slim Box Recessed



LP Slim Box Semi-Recessed

Product variants

Colour	Light source	Lumen	Shield	Lighting control
● Black	-	2284	MICRO PRISMATIC	Dali
● Dark aluminium raw	LED 3000K 25W	2295	OPAL	Dali high output
○ White	LED 3000K 35W	2304		Wireless bluetooth
	LED 4000K 25W	2319		Wireless bluetooth ho
	LED 4000K 35W	2342		
		2443		
		2451		
		2514		
		2621		
		2688		
		3087		
		3297		
		3312		
		3397		
		3538		
		3628		

Design

Louis Poulsen A/S

Weight


Min: 3.578 kg Max: 4.115 kg

Finish


Black, Dark aluminium raw, White

Light distribution diagrams


Cartesian

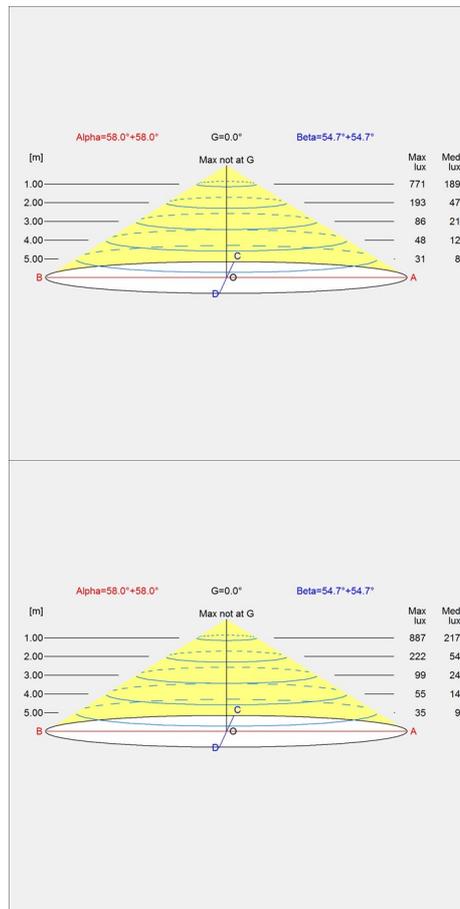


Isolux

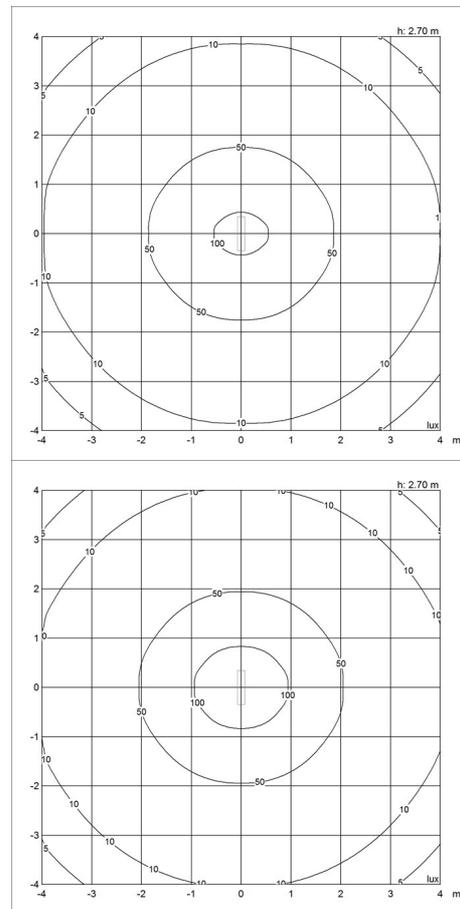


Polar

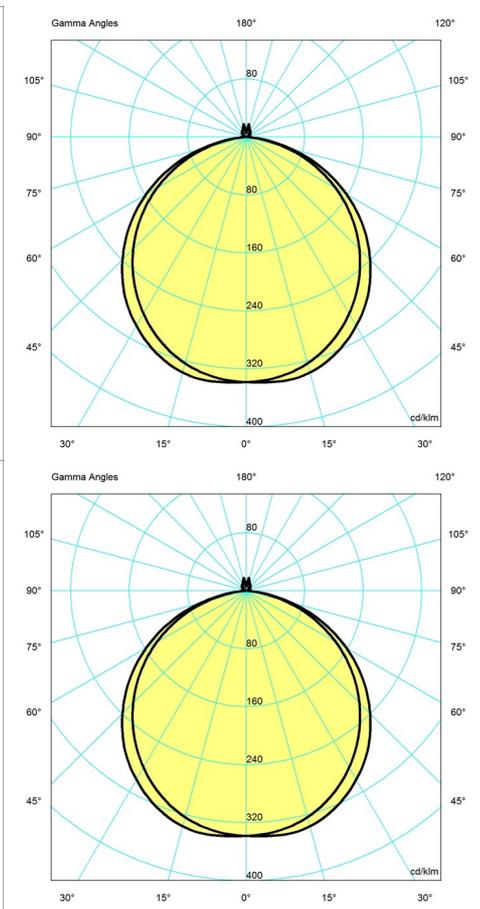

Cartesian

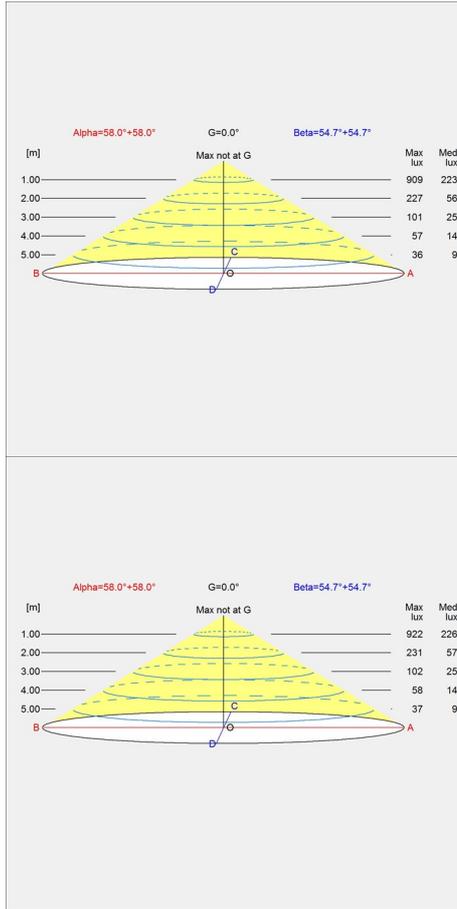

Isolux

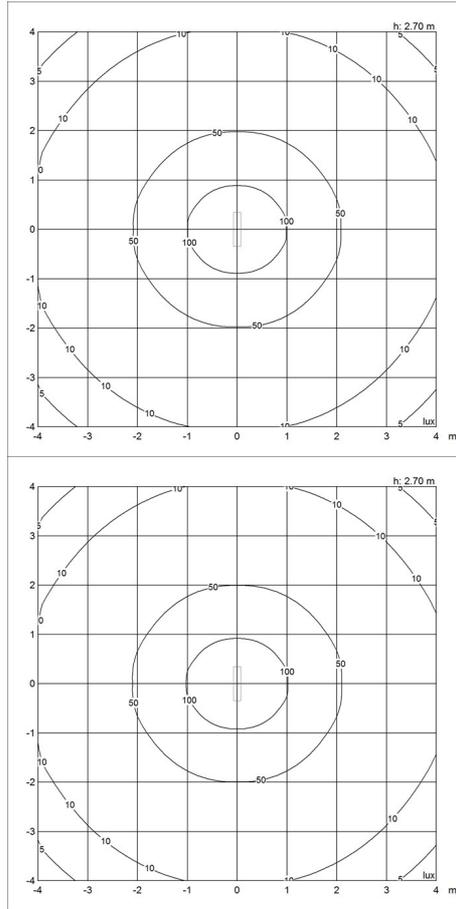

Polar

