


TOLDBOD 290 POST

The light is directed 100% downwards and the shade has a matt white painted interior emitting a soft, diffused, comfortable light.

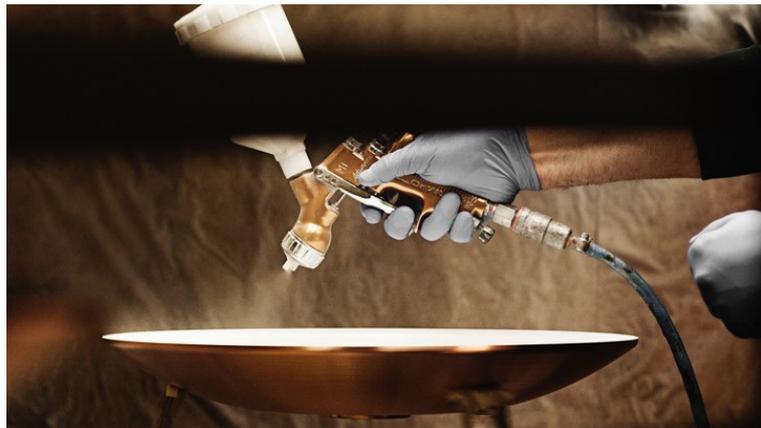

Product info

Information

Fixture heads without pole are available for Ø 48mm or Ø 60mm poles. For fixture complete with Ø 60mm pole: choose "for Ø 48mm pole" (pole stub); outer pole dimension is Ø 60mm. Please note that for the aluminium coloured version both the pole top, arm and the pole itself are galvanized. Galvanized surfaces will oxidise and form a thin zinc-oxide layer on the surface over time. This can result in an inconsistent surface finish during oxidation. This process might have begun already during stocking/transportation. The formed zinc-oxide layer protects the galvanizing against additional corrosion. All variants available with Zhaga socket for Smart City compatibility. Including CLO and night time dimming options. Please contact Louis Poulsen for 2700K.

Mounting

Pole dimension: Ø 48 mm or Ø 60 mm. Installation cable: 3,5m 2x1 mm² (-DPC Cl.II), 3,5m 3x1 mm² (-DPC Cl.I), 3,5m 4x1 mm² (-DAC Cl.II), 3,5m 5x1 mm² (-DAC Cl.I). Driver: In fixture head.

Finish

Aluminium coloured with textured surface or black with textured surface, powder coated.

Materials

Fixture head: Die cast aluminium. Shield: Injection moulded clear polycarbonate. Pole top: Galvanized, steel.

Sizes and weights

width x Height x Length (mm) | 290 x 300 x 475 Max 8.0 kg

Class

Ingress protection IP65. Electric shock protection I w. ground, II w/o ground. IK08. Lumen: 1930

Light source

LED 3000K 16W

Lumen: 1930

Information

Fixture heads without pole are available for Ø 48mm or Ø 60mm poles. For fixture complete with Ø 60mm pole: choose "for Ø 48mm pole" (pole stub); outer pole dimension is Ø 60mm. Please note that for the aluminium coloured version both the pole top, arm and the pole itself are galvanized. Galvanized surfaces will oxidise and form a thin zinc-oxide layer on the surface over time. This can result in an inconsistent surface finish during oxidation. This process might have begun already during stocking/transportation. The formed zinc-oxide layer protects the galvanizing against additional corrosion. All variants available with Zhaga socket for Smart City compatibility. Including CLO and night time dimming options. Please contact Louis Poulsen for 2700K.

Related products



Toldbod Pendant



Toldbod Glass Pendant



Toldbod 155 Outdoor Wall Lamp



Toldbod 155 Bollard



Toldbod 290 LED Upgrade Kit



Toldbod 220 Outdoor Wall Lamp



Product variants

Colour	Mounting	Arm type	Light source	Class	Lighting control
<input type="radio"/> Aluminium colour texture <input type="radio"/> Black texture	Ø 48 pole Ø 60 pole	GALVANIZED PAINTED	LED 3000K 16W	I II	Dac: dali + clo Dpc: nightdim + clo

Design

Louis Poulsen A/S

Weight


Min: 3.684 kg Max: 8.034 kg

Finish


Aluminium colour texture, Black texture

Light distribution diagrams


Cartesian

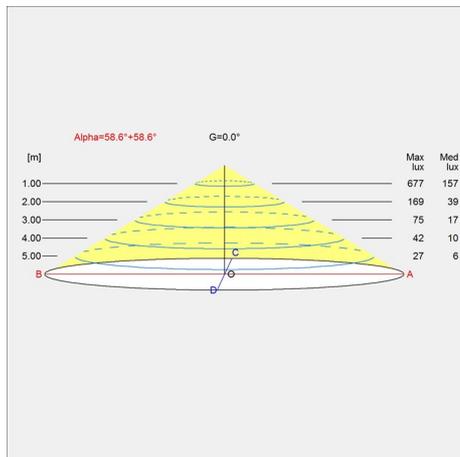

Isolux

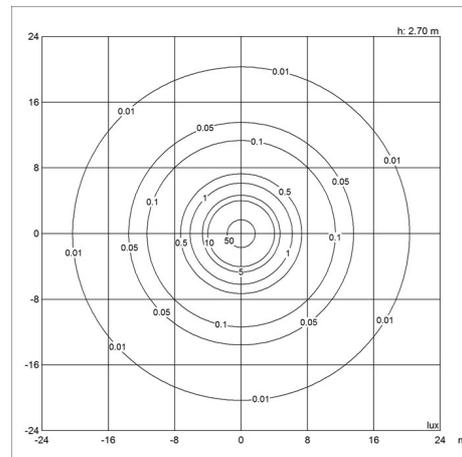

Polar

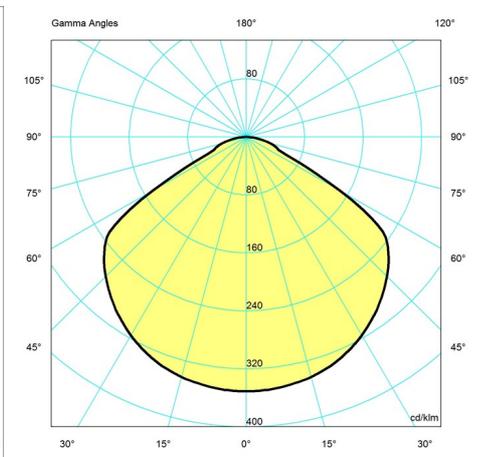

Spare parts & accessories

Product	Variant number
Toldbod 290 diffuser	5747305050
TOLDBOD POLE, H2700 Ø60/Ø48 HATCH, GALV	5710500112
TOLDBOD POLE 2700/CC160 60/48 HATCH GALV	5747826827
TOLDBOD POLE, H2700 Ø60/Ø48 HATCH, BLACK	5747827033
TOLDB POLE H2700/CC160 Ø60/48 HATCH BLK	5747827046

