

WATERFRONT

The fixture emits 100% glare-free downward light. The light distribution is symmetric and soft. The four supports create a comfortable symmetric light pattern at ground level.



Product info

Information

The intermediate ring solution is used when the fixture is to be mounted without post directly on a flat surface. The post and intermediate ring are delivered in the same colour as the fixture head. Detailed information about installation and looping possibilities can be found on our Internet page. The fixture is IP65. The bollard pole door is IP44. Post for base plate installation is supplied without anchor bolts. Anchor bolts to be sourced locally. The innovation of the LED technology is constant. The specifications mentioned are based on present technology. Please contact Louis Poulsen for 2700K.

Mounting

In-ground struts: Yes. Terminal block positioning: In installation box (not included). Looping: Depends on type of installation box. Driver positioning: In fixture head. Max. installation cable: Depending on installation box. Post f/in-ground installation: Height excluding fixture head: 1195mm, including 600mm below ground. Bollard with base plate for surface mounting: Height excluding fixture head: 595mm. Post diameter 210mm. Installation box must be supplied separately.

Finish

Aluminium coloured with textured surface or graphite with textured surface, powder coated.

Materials

Enclosure: Injection moulded clear polycarbonate. Housing: Die cast aluminium. Top: Die cast aluminium. Post: Extruded aluminium. Base plate: Die cast aluminium.

Sizes and weights

width x Height x Length (mm) | 260 x 865 x 260 Max 19.1 kg

Class


Ingress protection IP65. Electric shock protection I w. ground, II w/o ground. IK10.

Light source

LED 3000K 17W
Lumen: 663

Information

The intermediate ring solution is used when the fixture is to be mounted without post directly on a flat surface. The post and intermediate ring are delivered in the same colour as the fixture head. Detailed information about installation and looping possibilities can be found on our Internet page. The fixture is IP65. The bollard pole door is IP44. Post for base plate installation is supplied without anchor bolts. Anchor bolts to be sourced locally. The innovation of the LED technology is constant. The specifications mentioned are based on present technology. Please contact Louis Poulsen for 2700K.

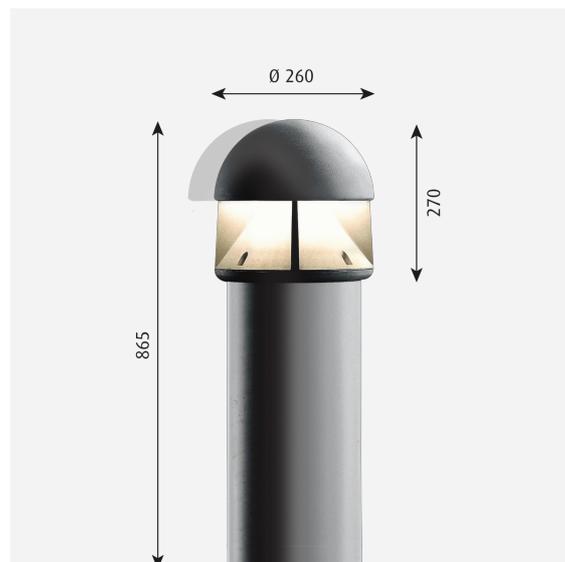

Product variants

Colour	Light source	Lumen	Class	Pole type	Lighting control
● Aluminium colour texture	LED 3000K 17W	564	I	POST F/IN-GROUND INSTALLATION	Dac: dali + clo
● Graphite grey texture		663	II	POST W/BASE PLATE	Dpc: nightdim + clo

Design

Dan Borgen Haslov

Weight


Min: 13.681 kg Max: 19.134 kg

Finish


Aluminium colour texture, Graphite grey texture

Light distribution diagrams


Cartesian

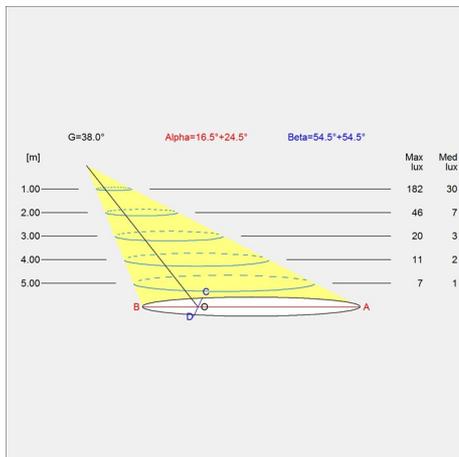

Isolux

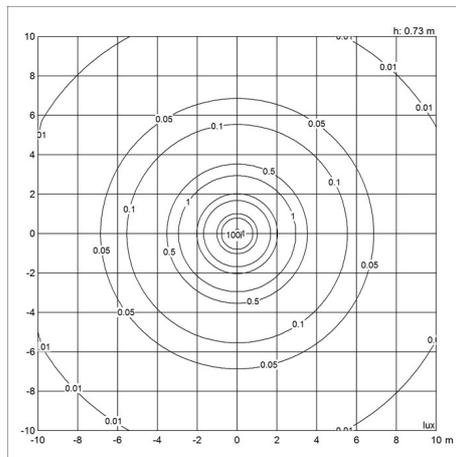

Polar

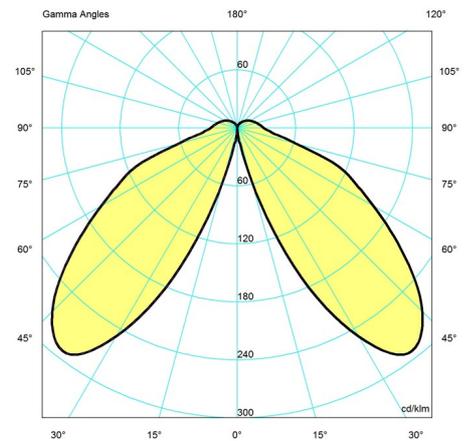

Spare parts & accessories

Product

- WATERFRRO, INTERMEDIATE RING, COLOUR ALU.
- WATERFR, INTERMEDIATE RING, GRAPHITE GREY
- Waterfront spare LED module 4K M60
- WATERFRONT, AQUA STOPPER Ø 210 T=30MM

Variant number

- 5747291973
- 5747503661
- 5747504806
- 5747293324

