

# FLOS

09.8119.WAACB White

## Camera 60 3 Phase Track Casambi integrated

UPGRADE

Designed by Knud Holscher, 2020



Spotlight to be installed on 3-phase track with LED light source. 220- 240V, 50-60Hz power supply integrated.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
System power (W)	20
Source flux (lm)	1624
Lumen Output (lm)	1371
Efficacy (lm/W)	69

### Physical

Colour	White
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Net weight (kg)	0.65
IP internal	20

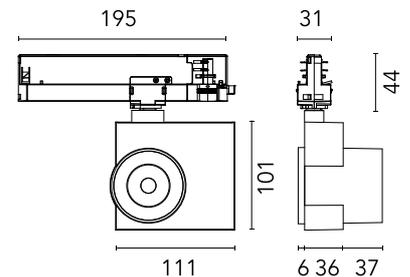

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



## Schematic light drawing



## Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3500
CRI>	97
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L70B35 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	50
Beam angle C90-270 (°)	50
UGR <sub>L</sub>	<10

## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED current (mA)	500
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable Casambi
Dimming range (%)	5-100
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

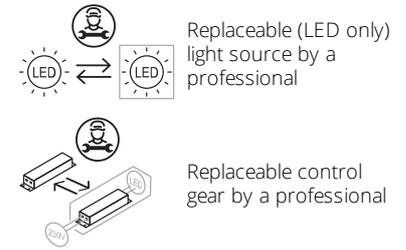

## Notes

Maximum distance between luminaires: 10m. Compatible track systems Nuco / EUTRAC / GLOBAL / STAFF / NORLUX / Powergear. The compatibility may become invalid when the critical track dimension is modified by the brand owner in case of engineering change or optimization in the future.

## Accessories & Power Supply



OPTIONAL  
Accessory

08.0176.14

Honeycomb