


Almendra Linear Suspension 4

Designed by Patricia Urquiola, 2022


60W - 1784lm - 2700K - CRI > 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with matte white finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

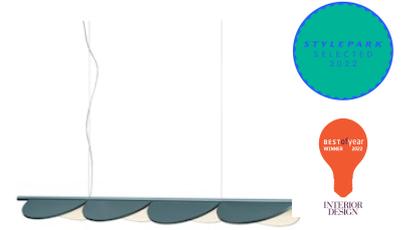

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

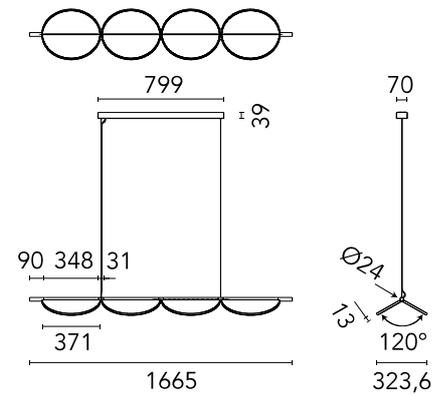

Main specifications

EAN	8059607048412
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	60
Lumen Output (lm)	1784

Physical

Colour	Bay Blue Metallized
Length (mm)	1665
Cord colour	Clear
Cord length (mm)	2600
Canopy colour	White
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	10.18
Package volume (m3)	0.22
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

Schematic light drawing



Beam Angle: 115°

h(m)	E(lx)	D(m)
1	150	3.14
2	38	6.28
3	17	9.41
4	9	12.55
5	6	15.69

Luminous flux Luminaire
446 lm

Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only) light source by a professional




Replaceable control gear by a professional

Spare Parts

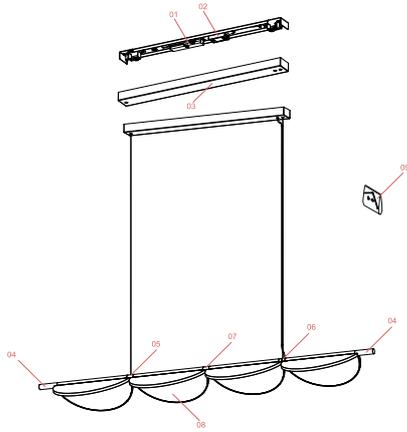

- | | | |
|-----|---|-----------|
| 01. | Driver 96W 48V 220-240V | RF32405 |
| 02. | Led dimmer kit | RF34197 |
| 04. | Terminal Joint L90 Almendra Bay
Blue Metallized | RF32777 |
| 05. | Assembly Almendra Suspension
Wiring & Connections Bay Blue
Metallized | RF32534 |
| 06. | Assembly Almendra Suspension
Central Feed Bay Blue Metallized | RF32525 |
| 07. | Assembly Almendra Suspension
Wiring Bay Blue Metallized | RF32573 |
| 08. | Assembly Almendra Suspension
Body Bay Blue Metallized | RF32518 |
| 09. | Kit with screws and allen key | RF3160100 |

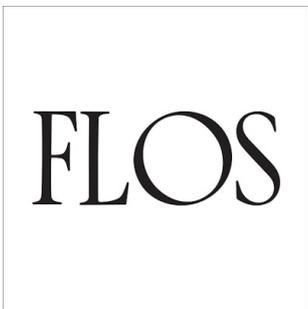

RF32405

Driver 96W 48V 220-240V




RF34197

Led dimmer kit




RF32777

Terminal Joint L90 Almendra Bay Blue Metallized

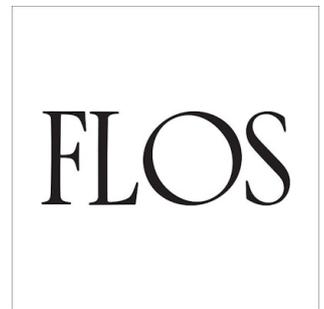


RF32534

Assembly Almendra Suspension Wiring & Connections Bay Blue Metallized

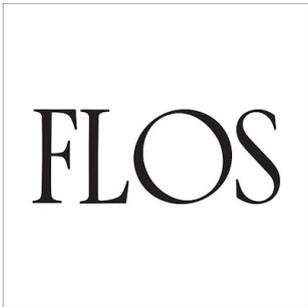

RF32525

Assembly Almendra Suspension Central Feed Bay Blue Metallized

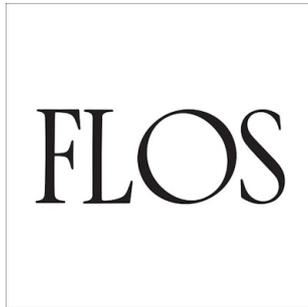

RF32573

Assembly Almendra Suspension Wiring Bay Blue Metallized



RF32518

Assembly Almendra Suspension Body Bay Blue Metallized



RF3160100

Kit with screws and allen key