# NOC WALL

HIGHLIGHTS

· Part of a progressive and technologically advanced lighting collection
· A flexible, engineered clip light with character
· Available in two variants; with touch sensitive button and integrated cable or with external cable and inline switch
· Suitable for both private and office environments
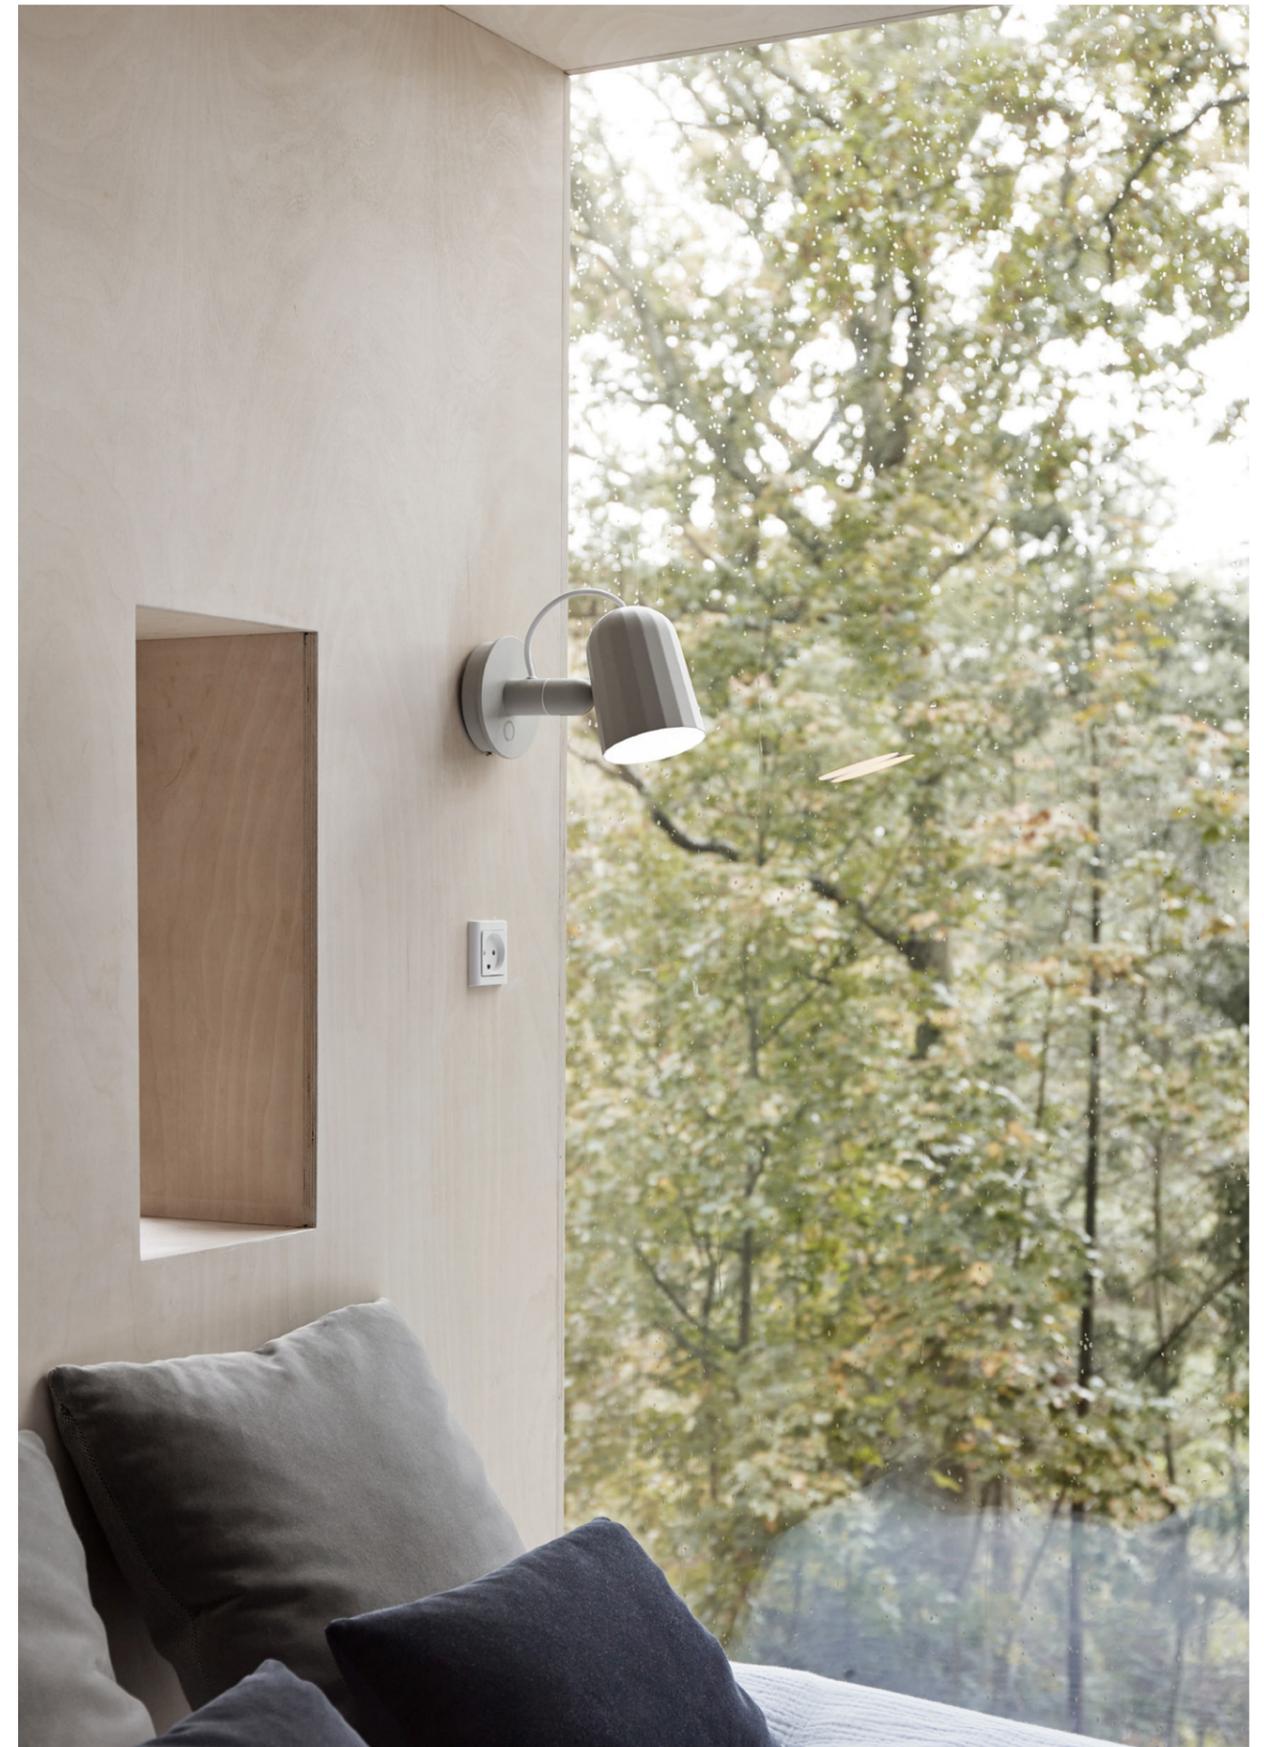· Qualified for contract use
· For indoor use only

# NOC WALL
# DESIGN BY SMITHMATTHIAS

Noc Wall is an adaptable die-cast aluminium wall light with a faceted shade and a smooth powder coat finish. The rotating mechanism provides two points of adjustment and the main light is fixed into the wall-mounted bracket allowing the cable to hang freely from the light to be plugged into a wall socket. Noc Wall is a versatile light for everyday use in both domestic and commercial settings. It is supplied with a two-metre cable with inline switch. Noc Wall is available in dark grey and off white.

London-based designers Jack Smith and Gemma Matthias take a responsible approach to their design work, which means that they design for the "long term." Having worked for several architects and design practices, their shared knowledge of manufacturing and their passion for enduring products has ead them to a utilitarian approach to contemporary design: they strive to create products that people can connect to, and that will be a pleasure to experience and use.

SmithMatthias

Noc Wall Buttton | Off white

Noc Wall | Dark grey

Noc Wall Button | Off white

## MATERIALS

**LAMP STEM AND BASE**
Machined aluminium

---

**LAMP SHADE**
Die cast aluminium.

---

**CORD**
Silicone cord. Black for both colours

---

## PRODUCT INFORMATION

**DESIGN YEAR**
2016

---

**COUNTRY OF ORIGIN**
China

---

## COLOUR & FINISH

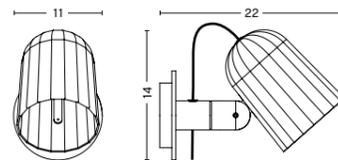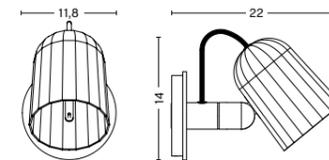Please note that the colours are indicative



Dark grey



Off white

## DIMENSIONS



**NOC WALL**
Width 11 cm
Depth 22 cm
Height 14 cm
Weight 0,80 kg



**NOC WALL BUTTON**
Width 11,8 cm
Depth 22 cm
Height 14 cm
Weight 0,78 kg

**NOC WALL**

## TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE
LED E14 (A15), 5,5W, 470lm, 2800K warm white
Bulb not included

DIMMABLE
No

POWER SUPPLY
220-240V AC at 50/60Hz

IP
20

CORD LENGTH
200 cm

SWITCH
Inline switch

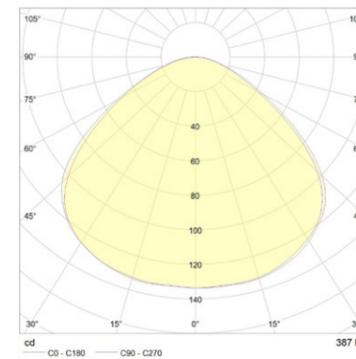## TEST SPECIFICATION OUTPUTS

Photometrics and the test specification shown is taken using the recommended LED bulb fitted in the production luminaire

LUMEN (LM)
470lm

KELVIN (CCT)
2800K warm white

CRI (1-100)
80

## PHOTOMETRICS

**NOC WALL BUTTON**

## TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE
LED E14 (A15), 5,5W, 470lm, 2800K warm white
Bulb not included

---

DIMMABLE
No

---

POWER SUPPLY
220-240V AC at 50/60Hz

---

IP
20

---

CORD LENGTH
Integrated in the wall

---

SWITCH
Integrated switch

---

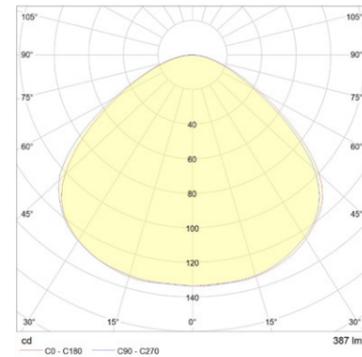## TEST SPECIFICATION OUTPUTS

Photometrics and the test specification shown is taken using the recommended LED bulb fitted in the production luminaire

LUMEN (LM)
470lm

---

KELVIN (CCT)
2800K warm white

---

CRI (1-100)
80

---

## PHOTOMETRICS

## CERTIFICATES

ETL APPROVED
This product has been assessed and complies with the essential requirements of the certificate.

CE APPROVED
This product has been assessed and complies with the essential requirements of the relevant European directives.

**LED**  $C\epsilon$  ⌂  IP20  ▢  ⌧  UK CA

Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including:

· EN 55015 (radio disturbance)
· EN 61547 (EMC immunity)
· EN 61000-3-2 (EMC compatibility)
· EN 61000-3-3 (EMC compatibility)
· EN 60598-2-1 (portable luminaires)
· EN 60598-1 (general requirements)

## DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.
**LINK TO DIGITAL LIBRARY**