

DESIGN BY NAOTO FUKASAWA

HAY

PAO STEEL PENDANT



HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection
- The collection includes a portable lamp, as well as pendants, table and floor lamps in different sizes in high-gloss steel or glass
- Pao Steel Pendant is an elegant, suspended light with high-gloss steel shade that emits a functional yet ambient glow
- Designed for use with a replaceable standard retro fit LED dimmable bulb
- The fitting can be used in conjunction with a number of standard wall-mounted dimming control units
- The lamp is suitable for both private and office environments
- Qualified for contract use

PAO STEEL PENDANT DESIGN BY NAOTO FUKASAWA

The Pao collection of lamps is an exciting collaboration with established Japanese designer Naoto Fukasawa. Named after the soft, glowing shape of traditional Mongolian Pao tents illuminated at night-time, Fukasawa set out to encapsulate the same atmospheric warmth and friendliness in the Pao Steel Pendant. Pao draws on Fukasawa's aesthetic of beautiful simplicity; creating an everyday object that draws on design values existing in the natural world. By keeping the aesthetics modest and simple, he brings the design into harmony with its environment, reinforcing his primary intention of making the atmosphere pleasant and comfortable. Thanks to developments in the latest LED-bulb technology, the light source can be concealed from view within the shade, which is closed off with high-quality Acrylic (PMMA) diffuser, resulting in a clean and simple design with no visual intrusions. The pendant's shades are crafted from steel with a high-gloss finish and are available in different sizes and colours. Their functionality and the deliberate simplicity of the design make them suitable for a wide range of spaces and uses in domestic and corporate environments.

Born in Yamanashi Prefecture in 1956, Naoto Fukasawa established NAOTO FUKASAWA DESIGN in 2003. His designs are known for their ability to access and communicate the true essence of an object. Currently, he designs for a wide range of leading brands worldwide, as well as consulting and designing for local Japanese companies; He also sits on the design advisory board of Muji and is the art director of Maruni. His designs span a wide variety of fields, from precision electronic equipment to furniture and interior spaces. Fukasawa is the curator of The Japan Folk Crafts Museum, professor in the Integrated Design Department at Tama Art University, and one of the directors of 21_21 Design Sight. He has been accorded the title of Royal Designer for Industry (Royal Society of Arts) and has been a recipient of the Isamu Noguchi Award. For HAY, he has designed the Pao Lamp Collection and Miz Water Bottle.



Naoto Fukasawa



Pao Steel Pendant 350 | Cream white



Pao Steel Pendant 470 | Soft black



Pao Glass Pendant 470 | Cream white



Pao Steel Pendant 470 | Cool grey



COLOUR & FINISH

	SIZE			
COLOUR		Ø230 mm	Ø350 mm	Ø470 mm
Soft black				
Cream white				
Red				
Cool grey				

Please note that the cable is black for all colour options.


MATERIALS

SHADE
Pressed steel with a high-gloss wet spray finish


DIFFUSER
Injection moulded opalescent acrylic (PMMA)

CORD
Braided fabric cable with a silicone insulation


DIMENSIONS



PAO STEEL PENDANT 230
Diameter 23 cm
Height 10 cm
Weight 1,1 kg



PAO STEEL PENDANT 350
Diameter 35 cm
Height 14,5 cm
Weight 2,2 kg

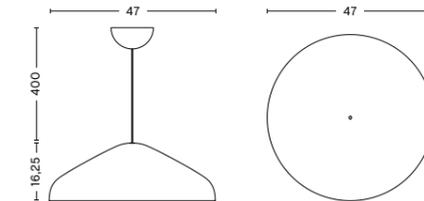

PAO STEEL PENDANT 470
Diameter 47 cm
Height 16,25 cm
Weight 3,34 kg

PRODUCT INFORMATION

DESIGN YEAR
2020

COUNTRY OF ORIGIN
China



PAO STEEL PENDANT 230

TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE

2 x LED G9, 3-5W (max. 5W), 300-600lm, 2700-3000K warm white
Bulbs not included

DIMMABLE

Yes

If used in conjunction with a wall mounted dimmer and suitable LED bulb

POWER SUPPLY

220-240V AC at 50/60Hz

IP

20

CORD LENGTH

400 cm

SWITCH

No

TEST SPECIFICATION OUTPUTS

Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire

LUMEN (LM)

495lm

(Taken with 2 x LED G9 bulbs)


KELVIN (CCT)

2700K, warm white

CRI (1-100)

80

PHOTOMETRICS

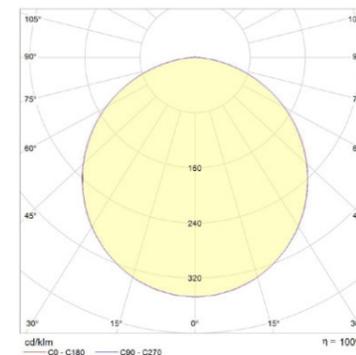



PAO STEEL PENDANT 350

TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE

2 x LED E14 (A15 or B35), 5-8W (max. 8W), 500-800lm, 2700-3000K warm white
Bulbs not included

DIMMABLE

Yes

If used in conjunction with a wall mounted dimmer and suitable LED bulb

POWER SUPPLY

220-240V AC at 50/60Hz

IP

20

CORD LENGTH

400 cm

SWITCH

No

TEST SPECIFICATION OUTPUTS

Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire

LUMEN (LM)

816lm

(Taken with 2 x LED E14 bulbs)


KELVIN (CCT)

2700K, warm white

CRI (1-100)

80

PHOTOMETRICS

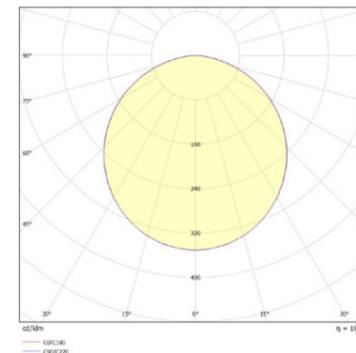



PAO STEEL PENDANT 470

TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE

2 x LED E27 (A19), 10-13W (max. 13W), 1000-1500lm, 2700-3000K warm white
Bulbs not included

DIMMABLE

Yes

If used in conjunction with a wall mounted dimmer and suitable LED bulb

POWER SUPPLY

220-240V AC at 50/60Hz

IP

20

CORD LENGTH

400 cm

SWITCH

No

TEST SPECIFICATION OUTPUTS

Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire

LUMEN (LM)

1513lm

(Taken with 2 x LED E27 bulbs)


KELVIN (CCT)

3000K, warm white

CRI (1-100)

85

PHOTOMETRICS

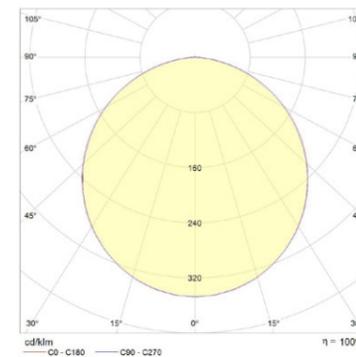

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

LED   IP20   

Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including.

- EN 60598-2-1 (portable luminaires)
- EN 60598-1 (general requirements)

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

[LINK TO DIGITAL LIBRARY](#)

