

Circ


suspension lamp




Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Functionality & accessories	Page 3
5. Recommended use & installation height	Page 3
6. Installation	Page 3
7. Photometric data and technical information	Page 3
8. Ordering codes	Page 4
9. Certifications & standards	Page 7
10. Maintenance & Cleaning	Page 7


Versions:



CIR_3714
Page 4

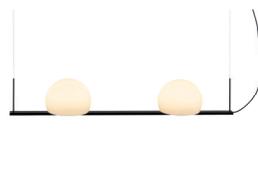

CIR_3715
Page 5

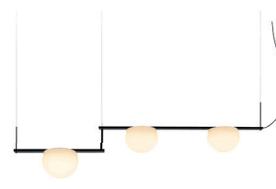

CIR_3716
Page 6

Circ

suspension lamp

1. Product overview


Metallic suspension lamp providing soft, diffused illumination through a satin-finished opal glass shade. The glass emits a gentle glow, delivering general ambient lighting.

Adjustable height for optimal positioning. The lamp can be mounted facing upward or downward to suit the space and lighting effect.

The CIR_3716 version features an articulated arm with a 90° lateral swing, adjustable at the time of installation.



2. Finishes and Materials

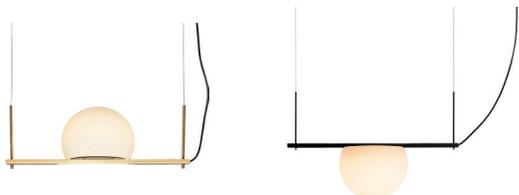

Shade: Glass

Canopy: 26 Black
74 White

Body: 61 Satin Gold
26 Black

3. Light Source & Dimming

Lamping per head

LED 6,2W (Ang. 120° / >90 CRI / 350mA) 230V / 2700K / Typ* 725 lumens

*Integrated LED module (included).

Dimming options:

Standard: TRIAC

Optional: DALI, CASAMBI


Circ

suspension lamp


4. Functionality & Accessories

Possibility to create different compositions. Versions and sizes available for projects. Consult our offices.


Lamp facing up

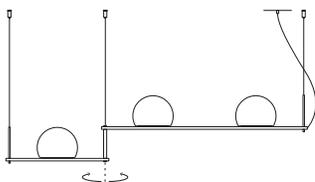


Lamp facing down

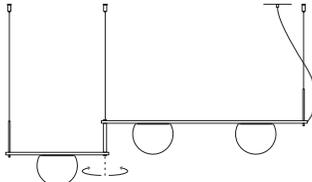

Articulated arm



Flower Pot Kit Accessory



5. Recommended use & Installation height

Suitable for general lighting, as well as for direct illumination above dining tables, countertops, bars, or desks. We **recommend positioning** the light source approximately **85 cm above the surface**. For more accurate information, refer to the photometric report.

6. Installation

Surface canopy



Recessed canopy with remote driver




Ø 50 mm drill in
dropped ceiling

7. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp. Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

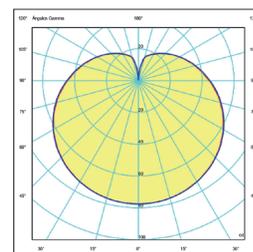

Circ

suspension lamp

8. Ordering Codes

Lamping

LED 6,2W (Ang 120° / >90 CRI / 350mA) 230V
2700K / Typ* 725 lumens

Canopy: Single

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes

Canopy:	Body:
26 Black	61 Satin Gold
74 White	26 Black



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
<p>CIR_3714S</p>	<p>Surface mounted. Driver in the canopy.</p>	<p>Black</p> <p>Black</p> <p>White</p> <p>White</p>	<p>Black</p> <p>Satin Gold</p> <p>Black</p> <p>Satin Gold</p>	<p>CIR_3714S_2626W</p> <p>CIR_3714S_2661W</p> <p>CIR_3714S_7426W</p> <p>CIR_3714S_7461W</p>
<p>CIR_3714R</p>	<p>Recessed, Remote driver Ø 50 mm drill</p>	<p>Black</p> <p>Black</p> <p>White</p> <p>White</p>	<p>Black</p> <p>Satin Gold</p> <p>Black</p> <p>Satin Gold</p>	<p>CIR_3714R_2626W</p> <p>CIR_3714R_2661W</p> <p>CIR_3714R_7426W</p> <p>CIR_3714R_7461W</p>

Circ

suspension lamp

8. Ordering Codes

Lamping

LED 2x6,2W (Ang 120° / >90 CRI / 350mA) 230V
2700K / Typ* 2x725 lumens

Canopy: Single

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes

Canopy:	Body:
26 Black	61 Satin Gold
74 White	26 Black



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
<p>CIR_3715S</p>	<p>Surface mounted. Driver in the canopy.</p>	<p>Black</p> <p>Black</p> <p>White</p> <p>White</p>	<p>Black</p> <p>Satin Gold</p> <p>Black</p> <p>Satin Gold</p>	<p>CIR_3715S_2626W</p> <p>CIR_3715S_2661W</p> <p>CIR_3715S_7426W</p> <p>CIR_3715S_7461W</p>
<p>CIR_3715R</p>	<p>Recessed, Remote driver Ø 50 mm drill</p>	<p>Black</p> <p>Black</p> <p>White</p> <p>White</p>	<p>Black</p> <p>Satin Gold</p> <p>Black</p> <p>Satin Gold</p>	<p>CIR_3715R_2626W</p> <p>CIR_3715R_2661W</p> <p>CIR_3715R_7426W</p> <p>CIR_3715R_7461W</p>

Circ

suspension lamp

8. Ordering Codes

Lamping


LED 3x6,2W (Ang 120° / >90 CRI / 350mA) 230V
2700K / Typ* 3x725 lumens

Canopy: Single

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes

Canopy:	Body:
26 Black	61 Satin Gold
74 White	26 Black

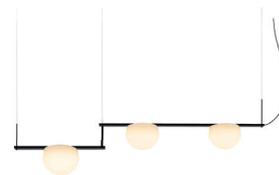


Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
<p>CIR_3716S</p>	<p>Surface mounted. Driver in the canopy.</p>	<p>Black</p> <p>Black</p> <p>White</p> <p>White</p>	<p>Black</p> <p>Satin Gold</p> <p>Black</p> <p>Satin Gold</p>	<p>CIR_3716S_2626W</p> <p>CIR_3716S_2661W</p> <p>CIR_3716S_7426W</p> <p>CIR_3716S_7461W</p>
<p>CIR_3716R</p>	<p>Recessed, Remote driver Ø 50 mm drill</p>	<p>Black</p> <p>Black</p> <p>White</p> <p>White</p>	<p>Black</p> <p>Satin Gold</p> <p>Black</p> <p>Satin Gold</p>	<p>CIR_3716R_2626W</p> <p>CIR_3716R_2661W</p> <p>CIR_3716R_7426W</p> <p>CIR_3716R_7461W</p>

Circ

suspension lamp

9. Certifications & Standards



Warranty: 2 years

100% made in Spain

10. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.