

Mood

suspension lamp



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Photometric Data and Technical Information	Page 3
5. Installation	Page 3
6. Functionality	Page 3
7. Recommended use & Installation height	Page 3
8. Ordering codes	Page 4
9. Certifications & standards	Page 9
10. Maintenance & Cleaning	Page 9

Versions



MOO_4062
Page 4



MOO_4063
Page 5



Clusters
Page 6-8

Mood

suspension lamp

1. Product overview

Metallic suspension lamp designed for accent or ambient lighting, featuring circular metal shades with folded edges concealing the integrated LED strips to provide soft indirect illumination. Shades are completely independent of the support magnets and they can be mounted facing up or facing down during installation. Adjustable height.

Recessed canopy option sits flush against the ceiling and requires a Ø60mm cut-out and a remote driver.



2. Finishes and Materials



Canopy: 74 White
91 Nude

Body: 74 White
91 Nude

3. Light Source & Dimming

Lamping per head (4062):

LED 19W (2700K / Ang. 120° / >80 CRI / 24V)
230V / Typ* 1800 lumens

*Integrated LED module (included).

Dimming options:

Standard: TRIAC

Optional: DALI, CASAMBI

Lamping per head (4063 + clusters):

LED 19W (2700K / Ang. 120° / >80 CRI / 24V)
100V - 277V / Typ* 1800 lumens

*Integrated LED module (included).

Dimming options:

Standard: 0-10V

Optional: DALI, CASAMBI

Mood


suspension lamp

4. Photometric Data and Technical Information


Photometric data corresponds to the output of each individual lamp. Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

White finish



Nude finish



5. Installation

Surface canopy



Compact canopy with remote driver



 Ø 60 mm drill in dropped ceiling

Multiple canopy



6. Functionality

Possible shapes: can be mounted facing up, down or in any position even after installation.



7. Recommended use & Installation height

Suitable for general lighting, as well as for direct illumination above dining tables, countertops, bars, or desks. We **recommend positioning** the light source approximately **85 cm above the surface**. For more accurate information, refer to the photometric report.

Mood

suspension lamp

8. Ordering Codes

Lamping 4062

LED 2x19W (2700K / Ang. 120° / >80 CRI / 24V)

230V / Typ* 2x1800 lumens

*Integrated LED module (included).

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes:

Canopy:

74 White

91 Nude

Body:

74 White

91 Nude



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
<p>MOO_4062S</p> <p> \varnothing 300 mm \varnothing 11.3/4" </p> <p> max. 2040 mm max. 80.3/8" </p> <p>1200 mm</p> <p>560 mm</p> <p> \varnothing 270 mm \varnothing 10.5/8" </p>	<p>Surface mounted. Driver in the canopy.</p>	<p>White</p> <p>Nude</p>	<p>White</p> <p>Nude</p>	<p>MOO_4062S_7474W</p> <p>MOO_4062S_9191W</p>
<p>MOO_4062R</p> <p> \varnothing 120 mm \varnothing 4.3/4" </p> <p> max. 2040 mm max. 80.3/8" </p> <p>1200 mm</p> <p>560 mm</p> <p>47.1/4"</p> <p>22"</p> <p> \varnothing 270 mm \varnothing 10.5/8" </p>	<p>Compact surface mounted. Remote driver \varnothing 60 mm drill</p>	<p>White</p> <p>Nude</p>	<p>White</p> <p>Nude</p>	<p>MOO_4062R_7474W</p> <p>MOO_4062R_9191W</p>

Mood

suspension lamp

8. Ordering Codes

Lamping 4063

LED 3x19W (2700K / Ang. 120° / >80 CRI / 24V)
 100V - 277V / Typ* 3x1800 lumens
 *Integrated LED module (included).

DIM: 0-10V (Optional DALI, CASAMBI)

Finishes:

Canopy:
 74 White
 91 Nude

Body:
 74 White
 91 Nude



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
MOO_4063S 	Surface mounted. Driver in the canopy.	White Nude	White Nude	MOO_4063S_7474W MOO_4063S_9191W
MOO_4063R 	Recessed, Remote driver Ø 60 mm drill	White Nude	White Nude	MOO_4063R_7474W MOO_4063R_9191W

Mood

suspension lamp

8. Ordering Codes

Lamping L92S2D

LED 4x19W (2700K / Ang. 120° / >80 CRI / 24V)

100V - 277V / Typ* 4x1800 lumens

*Integrated LED module (included).

DIM: 0-10V (Optional DALI, CASAMBI)

Finishes:

Canopy:

74 White

91 Nude

Body:

74 White

91 Nude



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
MOO_L92S2D 	Surface mounted. Driver in the canopy.	White Nude	White Nude	MOO_L92S2D_7474W MOO_L92S2D_9191W

Mood

suspension lamp

8. Ordering Codes

Lamping L92S1D1T

LED 5x19W (2700K / Ang. 120° / >80 CRI / 24V)

100V - 277V / Typ* 5x1800 lumens

*Integrated LED module (included).

DIM: 0-10V (Optional DALI, CASAMBI)

Finishes:

Canopy:


74 White

91 Nude

Body:

74 White

91 Nude

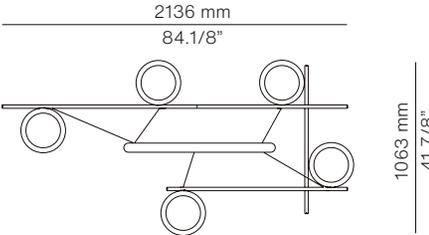Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
MOO_L92S1D1T 	Surface mounted. Driver in the canopy.	White Nude	White Nude	MOO_L92S1D1T_7474W MOO_L92S1D1T_9191W

Mood

suspension lamp

8. Ordering Codes

Lamping L92S2T

LED 6x19W (2700K / Ang. 120° / >80 CRI / 24V)

100V - 277V / Typ* 6x1800 lumens

*Integrated LED module (included).

DIM: 0-10V (Optional DALI, CASAMBI)

Finishes:

Canopy:

74 White

91 Nude

Body:

74 White

91 Nude



Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code
<p>MOO_L92S2T</p> <p>2071 mm 81.1/2"</p> <p>1063 mm 41.7/8"</p>	<p>Surface mounted. Driver in the canopy.</p>	<p>White</p> <p>Nude</p>	<p>White</p> <p>Nude</p>	<p>MOO_L92S2T_7474W</p> <p>MOO_L92S2T_9191W</p>

Mood

suspension lamp

9. Certifications & Standards

Recessed Canopy   $\frac{IP}{20}$  960° 

Surface Canopy   $\frac{IP}{20}$  960° 

Warranty: 2 years

100% made in Spain

10. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.