

# Volta

ceiling and wall light



## Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Installation	Page 3
5. Photometric data and technical information	Page 3
6. Ordering codes	Page 4
7. Certifications & standards	Page 6
8. Maintenance & Cleaning	Page 6

## Versions



3533  
Page 4-5

# Volta

ceiling and wall light


## 1. Product overview

Spotlight with metallic body and adjustable cylindrical aluminium head for optimal light direction.

Equipped with a PMMA lens diffuser (30° beam angle) and integrated LED. Includes an additional 80° optic lens.

The head rotates 330° and tilts up to 90° from the vertical axis.

Recessed canopy option sits flush against the ceiling or wall and requires a Ø55mm cut-out and a remote driver.

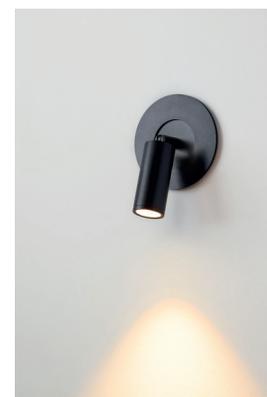

## 2. Finishes and Materials



26 Black

## 3. Light Source & Dimming

### Lamping (Surface Canopy)

LED 6,2W (Ang. 30° / >90 CRI / 350mA) 100V - 240V

2700K / Typ\* 725 lumens

3000K / Typ\* 763 lumens

\*Integrated LED module (included).

Optic lens: additional 80° optic lens included

### Dimming options:

Standard: NON DIMMABLE

Optional: TRIAC, DALI, CASAMBI

### Lamping (Recessed Canopy)

LED 6,2W (Ang. 30° / >90 CRI / 350mA) 230V

2700K / Typ\* 725 lumens

3000K / Typ\* 763 lumens

\*Integrated LED module (included).

Optic lens: additional 80° optic lens included

### Dimming options:

Standard: TRIAC


Optional: DALI, CASAMBI

# Volta


ceiling and wall light

## 4. Installation

Surface canopy



Recessed canopy with remote driver




Ø 55 mm drill in  
dropped ceiling

## 5. Photometric Data and Technical Information


Photometric data corresponds to the output of each individual lamp.  
Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

Optic lens 30°

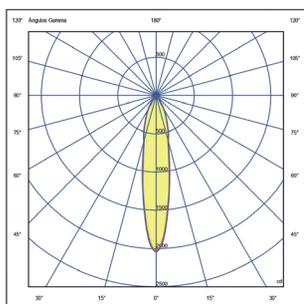

Optic lens 80°

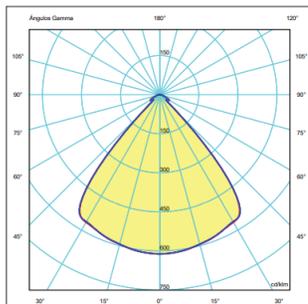

# Volta

ceiling and wall light

## 6. Ordering Codes

### Lamping 3533S

LED 6,2W (Ang. 30° / >90 CRI / 350mA) 100V - 240V

2700K / Typ\* 725 lumens

3000K / Typ\* 763 lumens

\*Integrated LED module (included).

**DIM:** NON DIMMABLE

(Optional: TRIAC, DALI, CASAMBI)

### Finishes

26 Black

**Optic lens:** additional 80° optic lens included

**Canopy:** Single Surface

Driver in the canopy

Drawing	Finish Canopy	Finish Body	Ordering Code 2700K	Ordering Code 3000K
<p>VOL_3533S</p>	Black	Black	VOL_3533S_2626W	VOL_3533S_2626M

# Volta

ceiling and wall light

## 6. Ordering Codes

### Lamping 3533R

LED 6,2W (Ang. 30° / >90 CRI / 350mA) 230V

2700K / Typ\* 725 lumens

3000K / Typ\* 763 lumens

\*Integrated LED module (included).

**DIM:** TRIAC

(Optional: DALI, CASAMBI)

### Finishes

26 Black



**Optic lens:** additional 80° optic lens included

**Canopy:** Single Recessed

Remote driver. Ø 55mm drill

Drawing	Finish Body	Finish Head	Ordering Code 2700K	Ordering Code 3000K
<p>VOL_3533R</p> <p>Ø 110 mm Ø 4.3/4"</p> <p>118 mm 4.5/4"</p> <p>75 mm 3"</p> <p>Ø 35 mm Ø 1.3/8"</p> <p>90°</p> <p>330°</p> <p>Ø 110 mm Ø 4.3/4"</p> <p>Ø 35 mm Ø 1.3/8"</p>	Black	Black	VOL_3533R_2626W	VOL_3533R_2626M


---

# Volta

ceiling and wall light

---

## 7. Certifications & Standards



Warranty: 2 years

100% made in Spain

---

## 8. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.