

Gada

wall light



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Functionality & accessories	Page 2
5. Ordering codes	Page 3
6. Certifications & standards	Page 4
7. Maintenance & Cleaning	Page 4

Versions



GAD_3921
Page 3

Gada

wall light

1. Product overview

Metallic wall-mounted lamp designed for accent or ambient lighting with indirect illumination. Shade customizable with textured vinyl finishes – including concrete, wood, or marble effects. Optional laser-cut signage available for wayfinding or numbering applications.



2. Finishes and Materials



Shade:
74 White

Textured vinyl shade:
50 Marble
51 Concrete
52 Wood



Optional laser-cut signage:
Minimum order 13 units

3. Light Source & Dimming

Lamping

LED 22W (3000K / Ang. 90° / >90 CRI / 500mA)
230V / Typ* 3150 lumens

*Integrated LED module (included).

Dimming options:

Standard: TRIAC
Optional: DALI, CASAMBI

4. Functionality & Accessories



Optional laser-cut signage
Minimum order 13 units

Gada

wall light

5. Ordering Codes

Lamping

LED 22W (3000K / Ang. 90° / >90 CRI / 500mA)
230V / Typ* 3150 lumens

*Integrated LED module (included).

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes:

Shade:
74 White


Textured vinyl shade:

50 Marble
51 Concrete
52 Wood



Drawing

GAD_3921

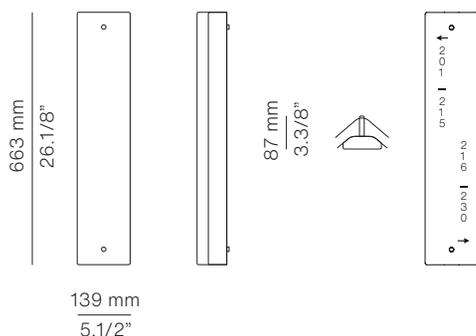

Mounting

Wall light
Surface mounted

Finish Body

White

Marble

Concrete

Wood

Ordering Code

GAD_3921_74M

GAD_3921_50M


GAD_3921_51M

GAD_3921_52M

Gada

wall light

6. Certifications & Standards



Warranty: 2 years
100% made in Spain

7. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.